
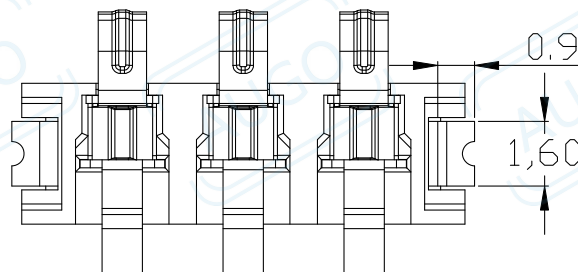
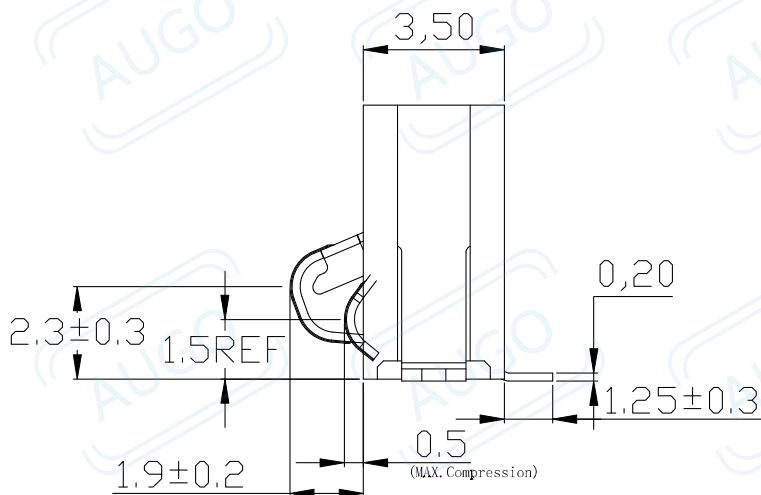
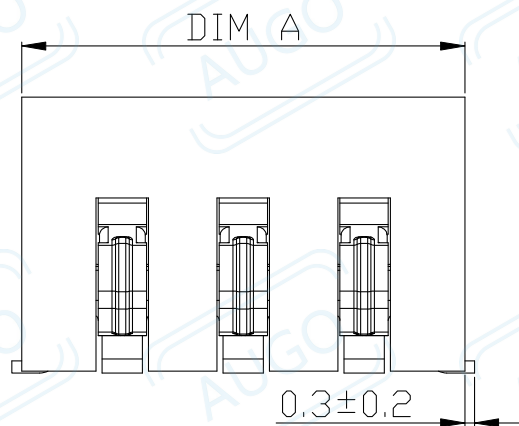
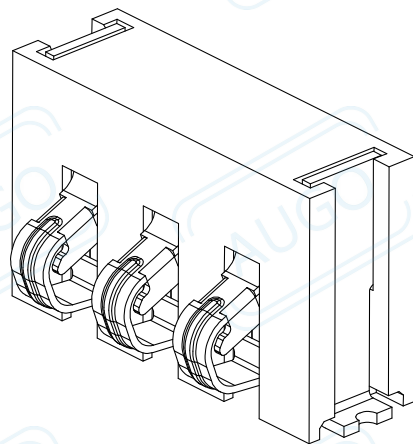



Rohs

REV.	DESCRIPTION	DRAW.	DATE.

Material:
Insulator : LCP(UL94V-0)
Contact : Phosphor Bronze
Contact Plated : Gold over Nickel or Tin
Specification:
Current Rating : 3A
Voltage Rating : 24V
Contact Resistance : 30mΩ
Insulation Resistance : 500MΩ
Dielectric Voltage : 500V
Operating Temperature : -40°~85°
Electrical Life : 5000cycles

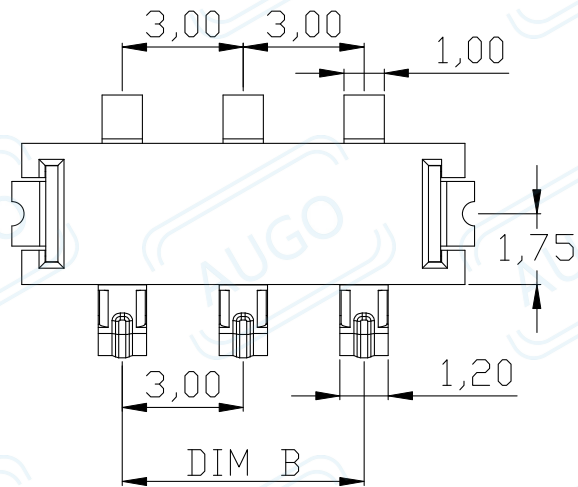

PART NO.	DIM A	DIM B
AUGO-BC-17L-2PD680	8.0	3.0
AUGO-BC-17L-2PD680	11.0	6.0
AUGO-BC-17L-2PD680	14.0	9.0
AUGO-BC-17L-2PD680	17.0	12.0
AUGO-BC-17L-2PD680	20.0	15.0

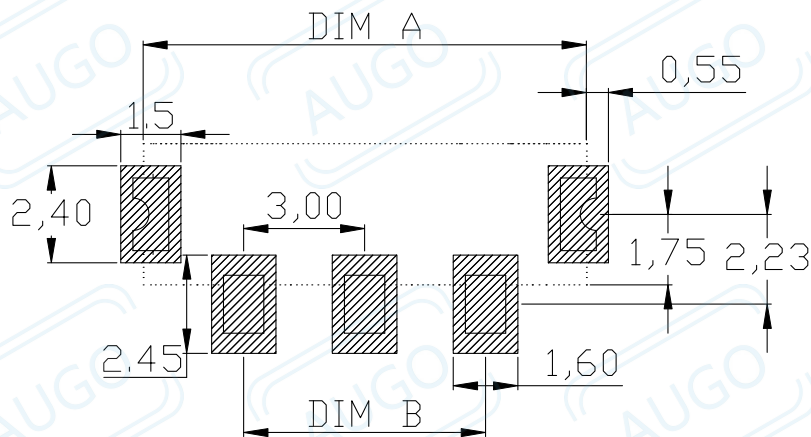

RECOMMENDED PCB LAYOUT
TOP VIEW(.XX±0.05)

AUGO

东莞市欧高电子有限公司
Dongguan Augo Electronics Co., Ltd
地址:广东省东莞市黄江镇新市东江路6号富汇创园 电话:0769-83363791

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED,TOLERANCE:	
SIZE:	A4		
SCALE: 1:1	UNIT: mm	X.	±0.20
SHEET: 1/1		X.x	±0.15
		X.xx	±0.10
		ANGULAR	±2°

TITLE:	3.0 PITCH BATTERY CONNECTOR	DESIGN	G.C.CHEN	DATE	
PART NO:	AUGO-BC-17L-3PD680	DRAWING	Y.C.ZHANG	DATE	
		CHECK	D.J.WANG	DATE	
		SCALE	1:1	PAGE	1 OF 1