

Rohs

REV.	DESCRIPTION	DRAW.	DATE.

Material:

Insulator : LCP(UL94V-0)

Contact : Phosphor Bronze

Contact Plated : Gold over Nickel or Tin

Specification:

Current Rating : 3A

Voltage Rating : 12V









Contact Resistance : 30mΩ

Insulation Resistance : 100MΩ

Dielectric Voltage : 500V

Operating Temperature : -40°~85°

Electrical Life : 5000cycles

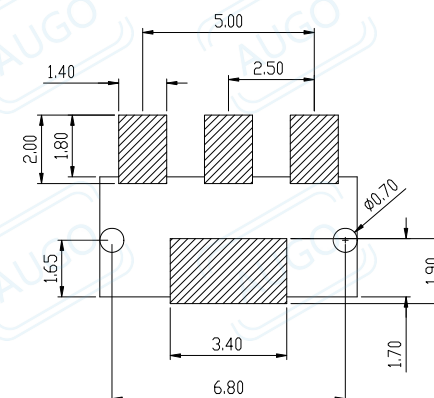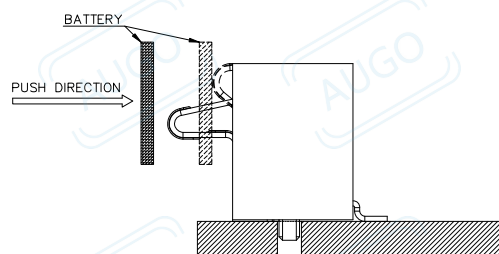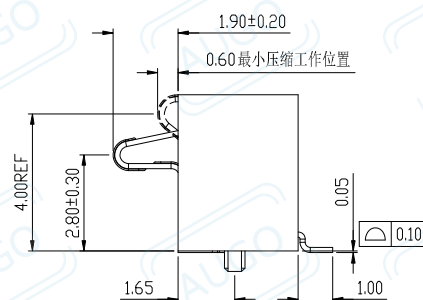

RECOMMENDED PCB LAYOUT
TOL:(±0.05)

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		TITLE:	2.5 PITCH BATTERY CONNECTOR	DESIGN	G.C.CHEN	DATE	
SIZE:	A4					DRAWING	Y.C.ZHANG	DATE	
SCALE: 1:1	UNIT: mm	X.	±0.20	PART NO:	AUGO-BC-25-3PD460	CHECK	D.J.WANG	DATE	
SHEET: 1/1		X.x	±0.15			SCALE	1:1	PAGE	1 OF 1
		X.xx	±0.10						
		ANGULAR	±2°						