

Rohs

REV.	DESCRIPTION	DRAW.	DATE.

Material:

Insulator : LCP(UL94V-0)

Contact : Phosphor Bronze

Contact Plated : Gold over Nickel or Tin

Specification:

Current Rating : 2A

Voltage Rating : 12V







Contact Resistance : 30mΩ

Insulation Resistance : 500MΩ

Dielectric Voltage : 500V

Operating Temperature : -40°~85°

Electrical Life : 5000cycles

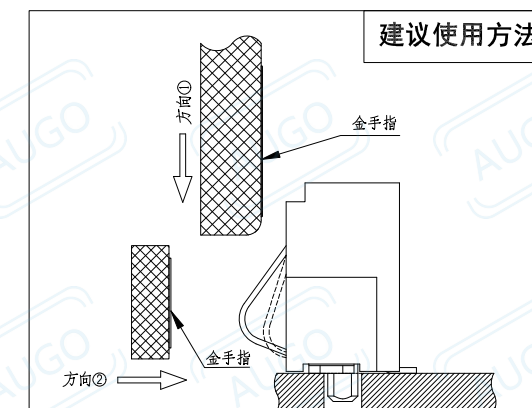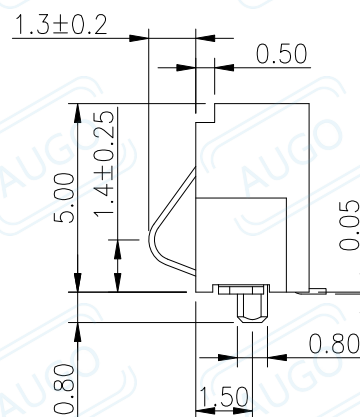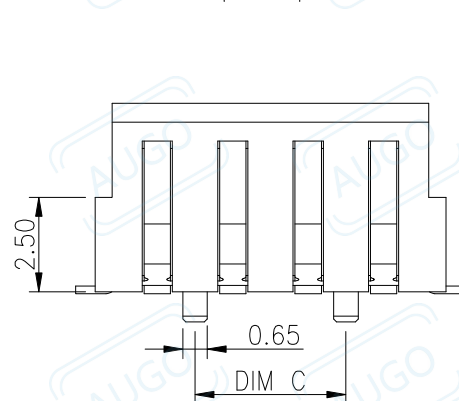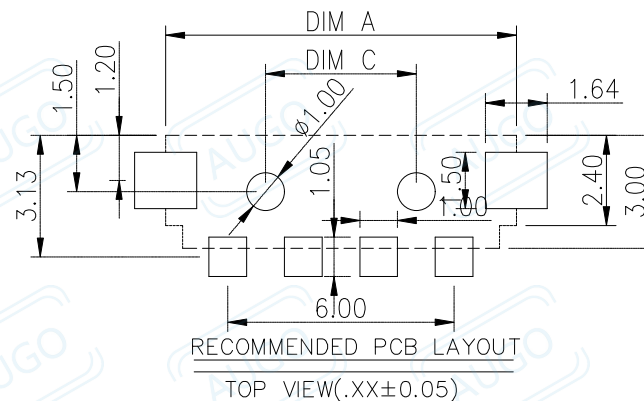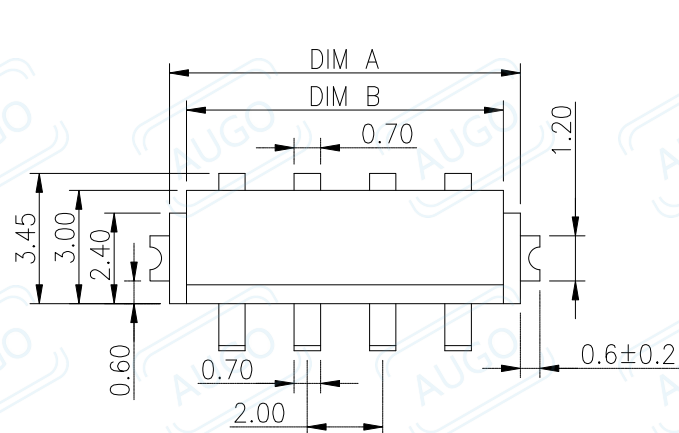

PART NO.	DIM A	DIM B	DIM C
AUGO-BC-22-2P500	5.3	4.4	2.0
AUGO-BC-22-3PD500	7.3	6.4	4.0
AUGO-BC-22-4PD500	9.3	8.4	6.0
AUGO-BC-22-5PD500	11.3	10.4	8.0
AUGO-BC-22-6PD500	13.3	12.4	10.0

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED,TOLERANCE:	TITLE:	2.00 PITCH BATTERY CONNECTOR	DESIGN	G.C.CHEN	DATE	1 OF 1
SIZE:	A4				DRAWING	Y.C.ZHANG	DATE	
SCALE: 1:1	UNIT: mm	X.	±0.5	PART NO:	CHECK	D.J.WANG	DATE	1 OF 1
SHEET: 1/1	ANGULAR	X.x	±0.3		SCALE	1:1	PAGE	
		X.xx	±0.2					
		±2°						