

Rohs

建议使用方法

REV.	DESCRIPTION	DRAW.	DATE.

Material :

Insulator : LCP(UL94V-0)

Contact : Phosphor Bronze

Contact Plated : Gold over Nickel or Tin

Specification :

Current Rating : 3A

Voltage Rating : 24V






Contact Resistance : 30mΩ

Insulation Resistance : 500MΩ



Dielectric Voltage : 500V

Operating Temperature : -40°~85°

Electrical Life : 5000cycles

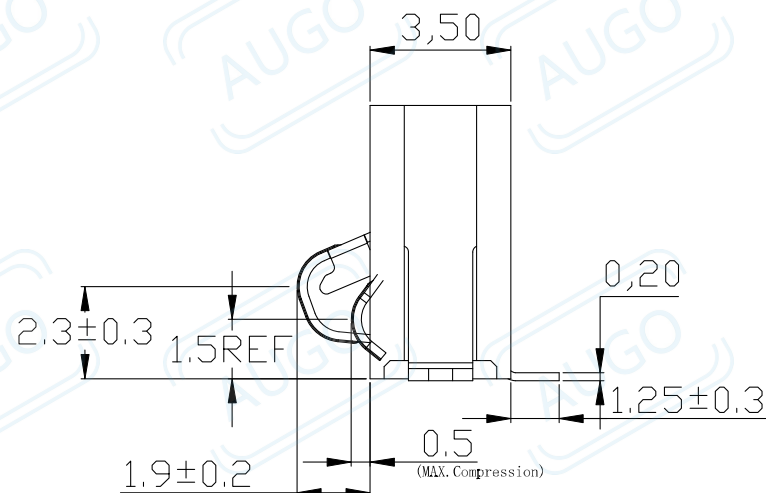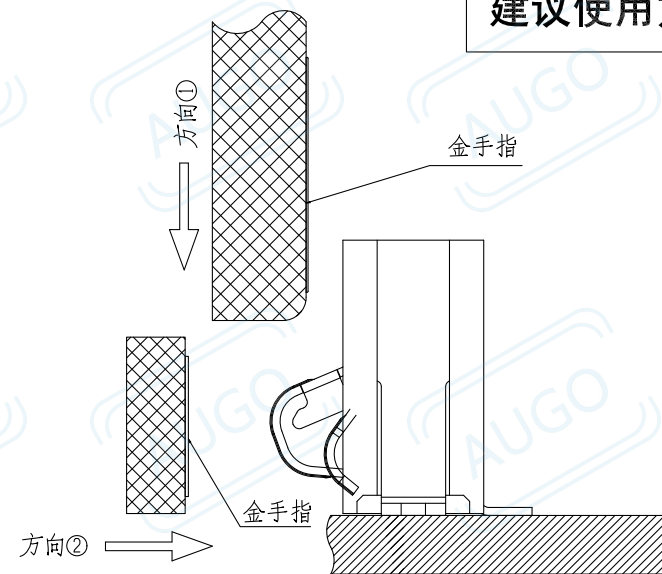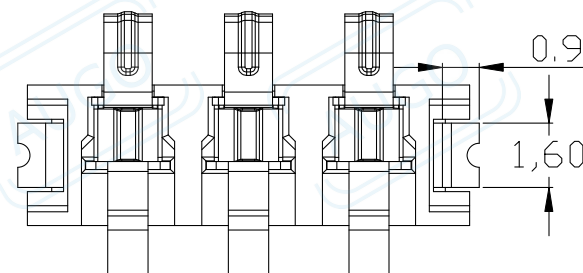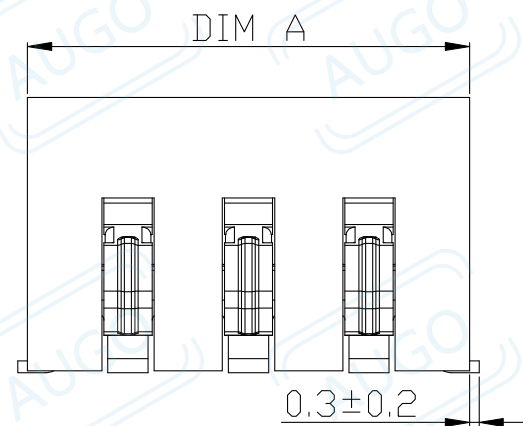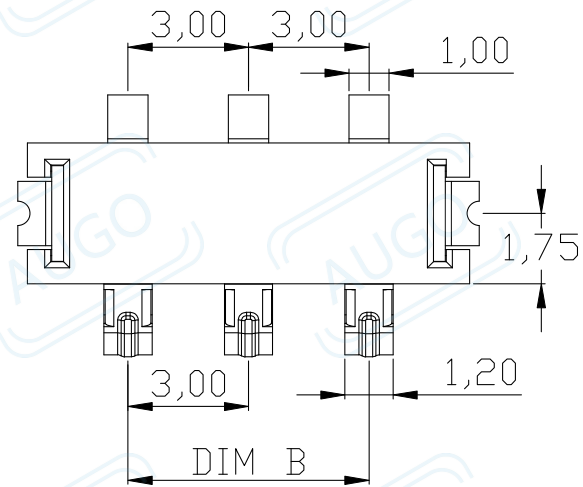

PART NO.	DIM A	DIM B
AUGO-BC-17L-2PD680	8.0	3.0
AUGO-BC-17L-3PD680	11.0	6.0
AUGO-BC-17L-4PD680	14.0	9.0
AUGO-BC-17L-5PD680	17.0	12.0
AUGO-BC-17L-6PD680	20.0	15.0

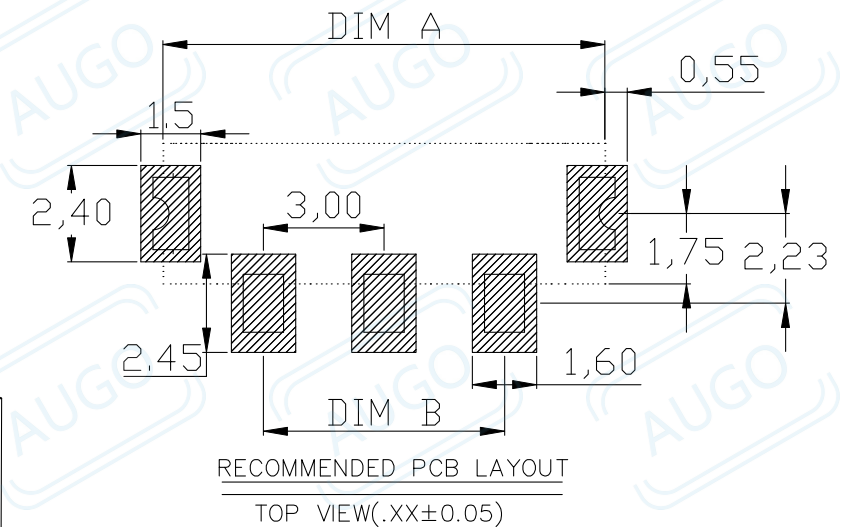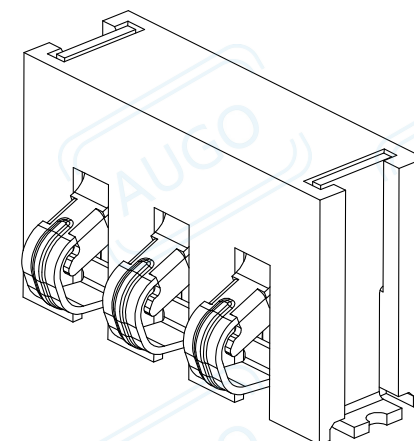

AUGO

东莞市欧高电子有限公司

Dongguan Augo Electronics Co.,Ltd

地址:广东省东莞市黄江镇新市东江路6号富汇创园 电话:0769-83363791

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:

01

UNLESS OTHERWISE
SPECIFIED,TOLERANCE:


SIZE:

A4

SCALE: 1:1

UNIT: mm

SHEET: 1/1



TITLE:

3.0 PITCH
BATTERY CONNECTOR

PART NO:

AUGO-BC-17L-3PD680

DESIGN

G.C.CHEN

DATE

DRAWING

Y.C.ZHANG

DATE

CHECK

D.J.WANG

DATE

SCALE

1:1

PAGE

1 OF 1