CHARACTERISTICS	
OPERATING FORCE:	300 gf max.
DIFFERENTIAL FORCE:	
RELEASE FORCE:	50 gf min.
FREE POSITION:	
OPERATING POSITION:	14.7±0.50 mm
PRE-TRAVEL:	1.60 mm max.
DIFFERENTIAL TRAVEL:	0.40 mm max.
OVER-TRAVEL:	0.80 mm min.
FULL OVERTRAVEL FORCE:	

ELECTRICAL DATA
CONTACT ARRANGMENT SPDT
16(4)A 125/250V~ 5E4 40T125 μ
16(4)A 125/250V~ 5E4 40T125 μ
16GPA 125/250VAC 1/2HP 125/250VAC

REV	DOCUMENT	CHANGED BY	CHECKED BY

CIRCUIT	MOUNTING HOLE GENERAL TOLERANCE: ±0.05
	

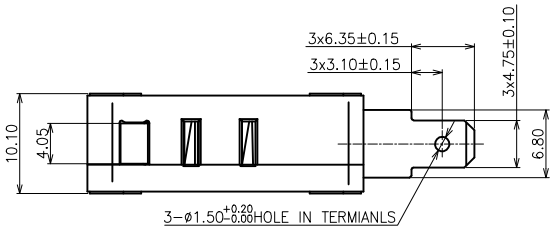

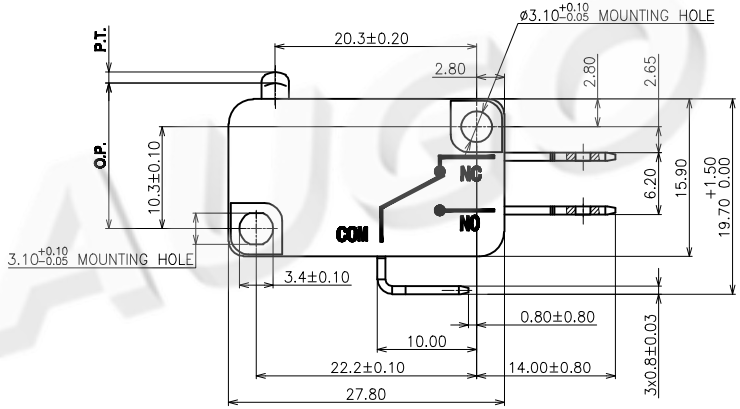



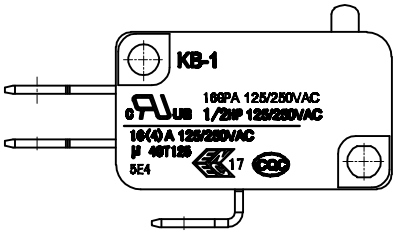



NOTES:
1 MOUNTING HOLES WILL ACCEPT ø3 MAX PINS OR SCREWS.
2 – TERMINALS WILL ACCEPT 4.7 WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

GENERAL TOLERANCE		单位 UNIT	mm	东莞市欧高电子有限公司						
.X±0.50	ANGLES	材质 MATERIAL	/							
.XX±0.30	X.° ±3°	体积 VOLUME	/	型号 PART NO.	KB-1-16GPA					
.XXX±0.10	.X° ±1.5°	重量 WEIGHT	/	料号 PART NO.						
设计 DESIGNED		表面积 SURFACE	/	图号 DRAWING NO.					版本 REV.	A0
审核 CHECKED		图类 TYPE	PRODUCT	角法 PROJ.		图幅 SIZE	A3	比例 SCALE 2:1	张数 SHEET	1/1
核准 APPROVED										

AUGO 欧高电子