


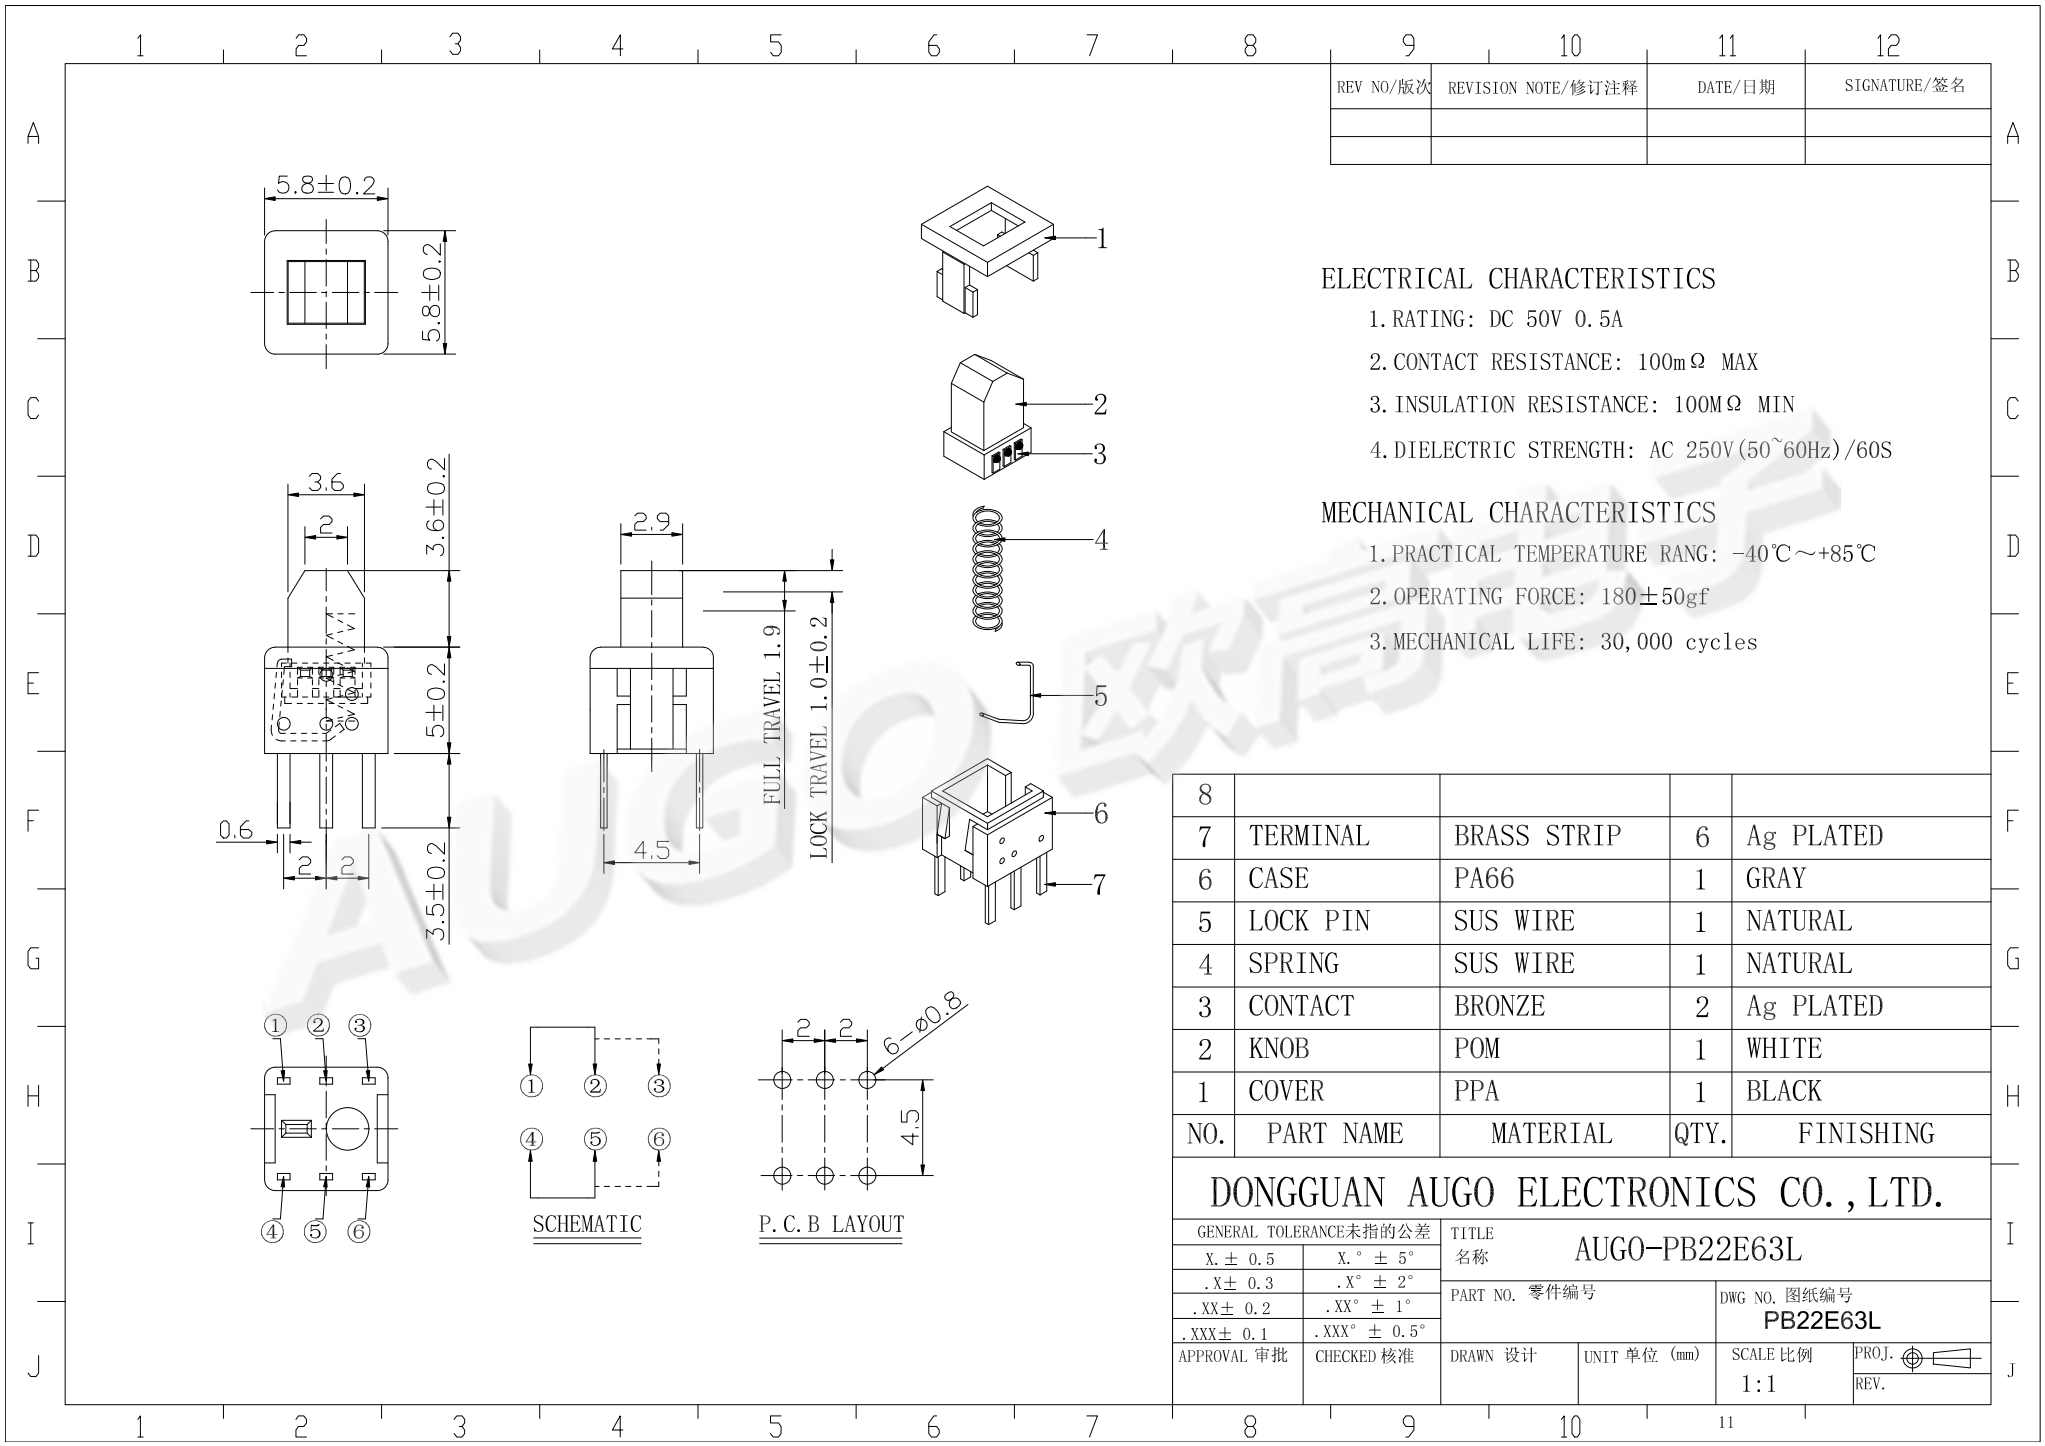

REV NO./版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名

ELECTRICAL CHARACTERISTICS

- 1. RATING: DC 50V 0.5A
- 2. CONTACT RESISTANCE: 100mΩ MAX
- 3. INSULATION RESISTANCE: 100MΩ MIN
- 4. DIELECTRIC STRENGTH: AC 250V (50~60Hz) /60S

MECHANICAL CHARACTERISTICS

- 1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
- 2. OPERATING FORCE: 180±50gf
- 3. MECHANICAL LIFE: 30,000 cycles

8				
7	TERMINAL	BRASS STRIP	6	Ag PLATED
6	CASE	PA66	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	POM	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

DONGGUAN AUGO ELECTRONICS CO., LTD.				
GENERAL TOLERANCE 未指的公差		TITLE		
X. ± 0.5	X. ° ± 5°	名称 AUGO-PB22E63L		
.X ± 0.3	.X° ± 2°	PART NO. 零件编号		DWG NO. 图纸编号
.XX ± 0.2	.XX° ± 1°			PB22E63L
.XXX ± 0.1	.XXX° ± 0.5°	DRAWN 设计		SCALE 比例
APPROVAL 审批	CHECKED 核准	UNIT 单位 (mm)	1:1	PROJ. 项目
				REV.