REV NO/版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名



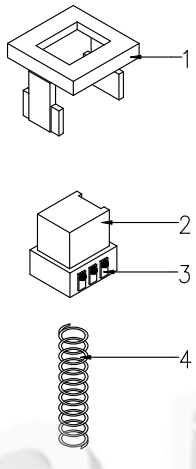

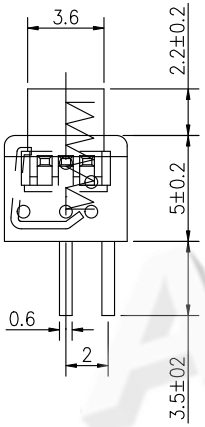



ELECTRICAL CHARACTERISTICS

1.RATING: DC 50V 0.5A

2.CONTACT RESISTANCE: 100mΩ MAX

3.INSULATION RESISTANCE: 100MΩ MIN

4.DIELECTRIC STRENGTH: AC 250V(50~60Hz)/60S

MECHANICAL CHARACTERISTICS

1.PRACTICAL TEMPERATURE RANG: −40℃~+85℃

2.OPERATING FORCE: 180±50gf

3.MECHANICAL LIFE: 30,000 cycles





SCHEMATIC



P.C.B LAYOUT

NO.	PART NAME	MATERIAL	QTY.	FINISHING
8				
7	TERMINAL	BRASS STRIP	4	Ag PLATED
6	CASE	PA66	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK

DONGGUAN AUGO ELECTRONICS CO.,LTD.

GENERAL TOLERANCE 未指的公差		TITLE 名称	AUGO-PB22E64L-4P		
X.± 0.5	X.°± 5°				
.X± 0.3	.X°± 2°	PART NO. 零件编号		DWG NO. 图纸编号 PB22E60	
.XX± 0.2	.XX°± 1°				
.XXX± 0.1	.XXX°± 0.5°				
APPROVAL 审批	CHECKED 核准	DRAWN 设计 苏维敏	UNIT 单位 (mm)	SCALE 比例 1:1	PROJ. REV.

AUGO 欧信电子