


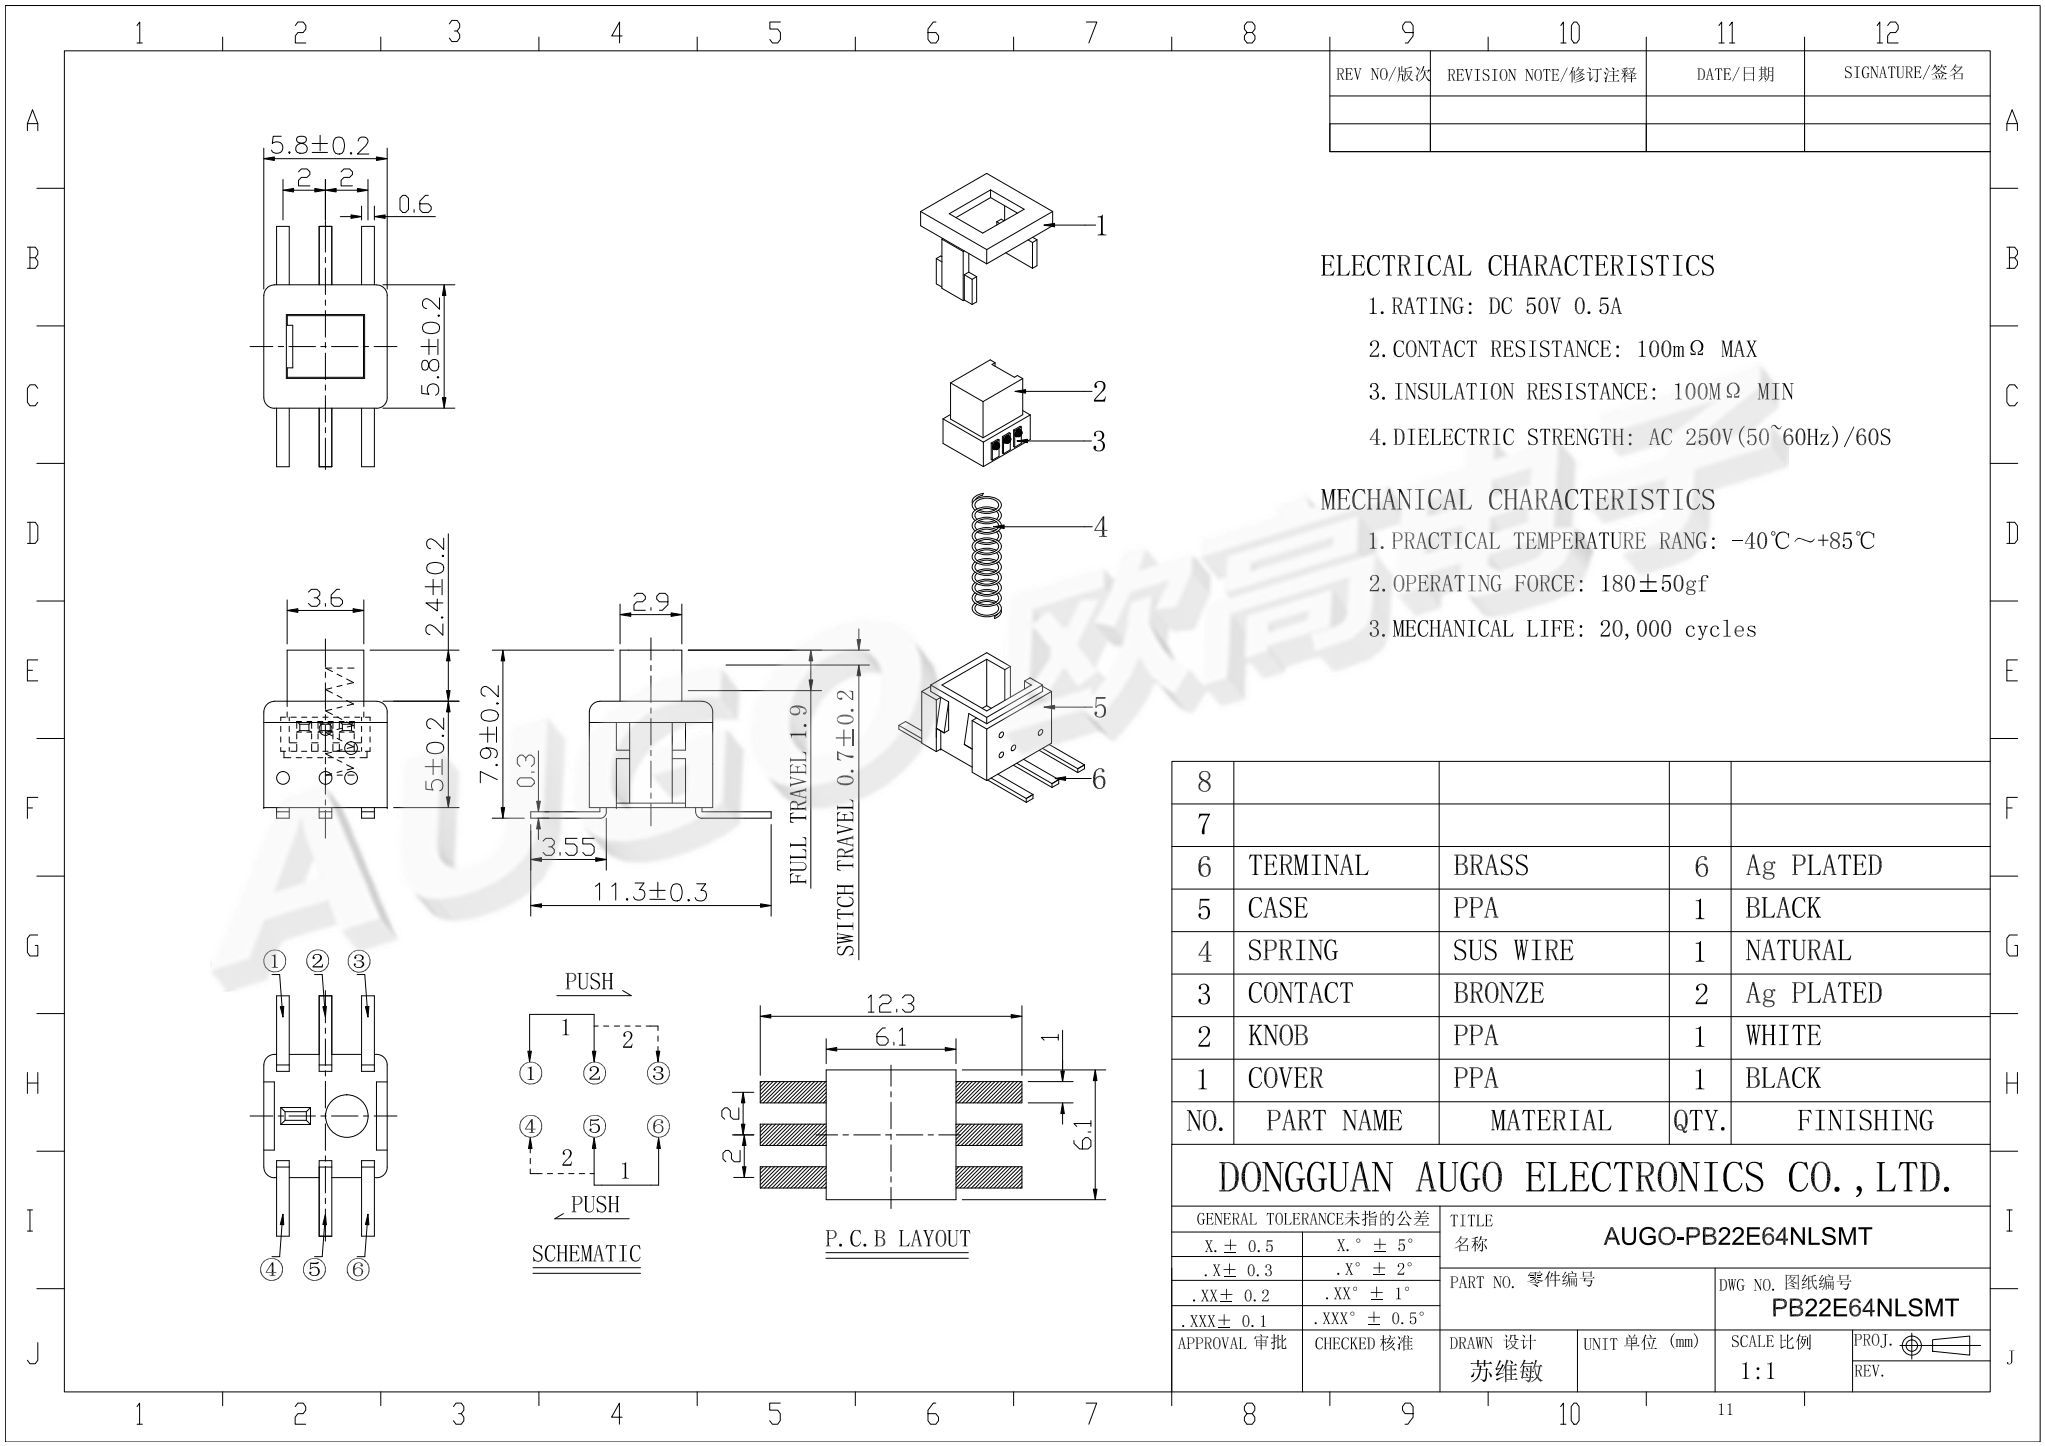

REV NO./版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名

ELECTRICAL CHARACTERISTICS

1. RATING: DC 50V 0.5A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz)/60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
2. OPERATING FORCE: 180±50gf
3. MECHANICAL LIFE: 20,000 cycles

8				
7				
6	TERMINAL	BRASS	6	Ag PLATED
5	CASE	PPA	1	BLACK
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PPA	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

DONGGUAN AUGO ELECTRONICS CO., LTD.

GENERAL TOLERANCE未指的公差		TITLE 名称		
X. ± 0.5	X.° ± 5°	AUGO-PB22E64NLSMT		
.X ± 0.3	.X° ± 2°			
.XX ± 0.2	.XX° ± 1°			
.XXX ± 0.1	.XXX° ± 0.5°			
APPROVAL 审批	CHECKED 核准	DRAWN 设计 苏维敏	UNIT 单位 (mm)	DWG NO. 图纸编号 PB22E64NLSMT
			SCALE 比例 1:1	PROJ. 项目 REV.