




CAD FILE:




ELECTRICAL CHARACTERISTICS

1. RATING: DC 30V 0.1A
2. CONTACT RESISTANCE: $100\text{m}\Omega$ MAX
3. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz) / 60S








MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
2. OPERATING FORCE: $250 \pm 50\text{gf}$
3. MECHANICAL LIFE: 30,000 cycles

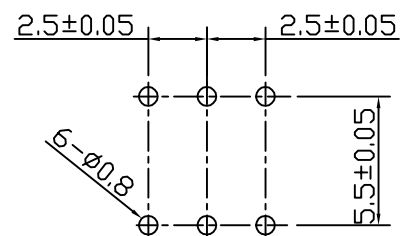

P. C. B LAYOUT



8					TOLERANCE UNLESS SPECIFIED				
7	TERMINAL	BRASS	6	Ag PLATED					
6	BASE	PPA	1	BLACK	WITHIN 1.5: $\pm 0.1\text{mm}$ OVER 1.5: $\pm 0.2\text{mm}$ ANGLES: $\pm 2^{\circ}$				
5	LOCK	STAINLESS STELL	1	NATURAL		ISSUE	DATE	DESCRIPTIONS	APPD.
4	SPRING	STAINLESS STELL	1	NATURAL	TITLE: VERTICAL PUSH SWITCH		UNIT:mm	DRWG. NO.:	
3	CONTACT	BRONZE	2	Ag PLATED	MODEL NO:AUGO-PB85L250-01		SCALE:4:1	DWN	Y.C.Z
2	BUTTON	PPA	1	WHITE	DONGGUAN AUGO ELECTRLNICS CO., LTD.			CHK'D	W.B.Q
1	COVER	PPA	1	BLACK				APPD.	G.C.C
NO.	DESCRIPTION	MATERIAL	QTY	PLATING					