


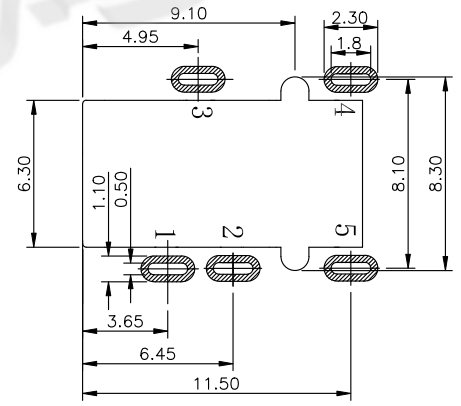

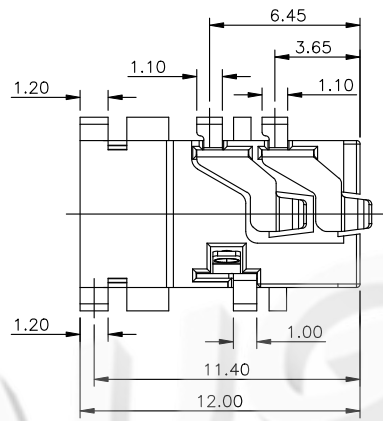

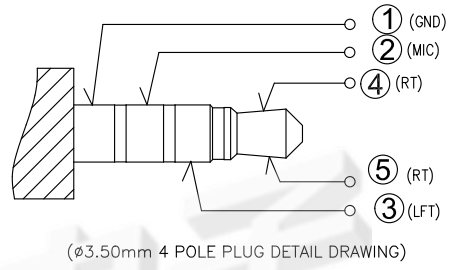


- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 1000Ω MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
- CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;

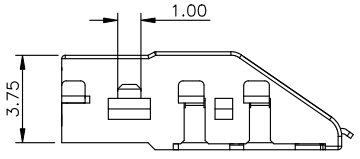

P.C.B LAYOUT
TOP VIEW

6	CONTACT 5#	1	PHOSPHOR BRONZE; NICKEL(50u" MIN.) UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA ;GOLD 1u" PLATING ON CONTACT AREA	
5	CONTACT 4#	1		
4	CONTACT 3#	1		
3	CONTACT 2#	1		
2	CONTACT 1#	1	PHOSPHOR BRONZE; NICKEL(50u" MIN.) UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA ;GOLD 1u" PLATING ON CONTACT AREA	
1	HOUSING	1	PART; COLOR BLACK	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		PHONE JACK		DRAWING	Y.C.Zhang	DWG.No.	Robin
PART NO.		PJ-0420XPC200		CHECK	G.C.Chen	REV.	A1
UNIT :	TOLERANCE	UP TO 5	±0.2	APPROVAL	DATE		SCALE
	OTHERWISE	ABOVE 5 30	±0.3		PAGE		
mm		ABOVE 30	±0.5	SCALE	4:1	PAGE	1 OF 1
		ANGLE	±3'				