

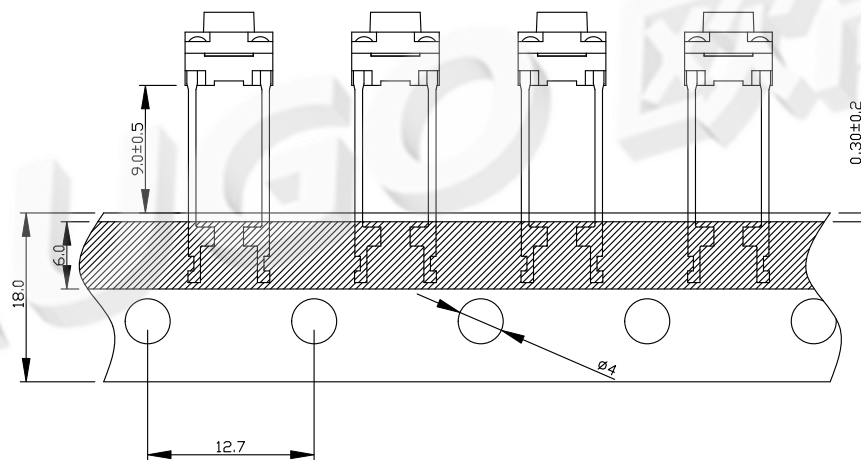



主要技术规格:

1. 额 定 值: 50mA DC12V
2. 接触电阻: $\leq 50m\Omega$
3. 操 作 力: $250 \pm 40gf$
4. 行 程: $0.25 \pm 0.1mm$
5. 绝缘电阻: $\geq 100M\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿 命: 100,000 Cycles
8. 防水等级: IP67

H	
4.3	4.5
5.0	5.5
6.0	6.5
7.0	7.5
8.0	8.5
9.0	9.5

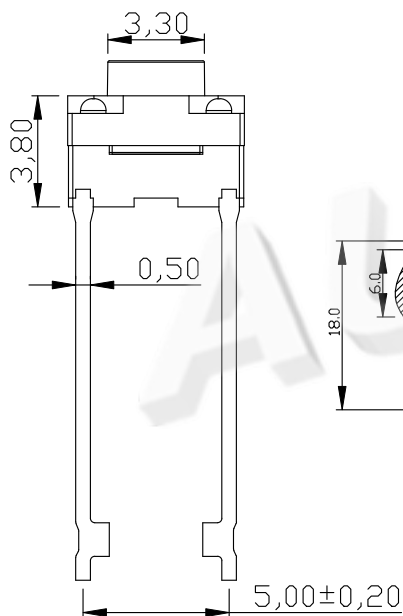

电 路 图



PCB. 焊接图

序号	部件名称	材料	备注
1	按钮	PPA	耐温280℃ (黑色)
2	盖板	PPA	耐温280℃ (黑色)
3	防水垫	硅胶	耐温280℃ (黑色)
4	防水膜	PI	耐温280℃ (黄色)
5	簧片	不锈钢	覆银
6	基座	PPA	耐温280℃ (黑色)
7	引脚、触点	黄铜	镀银

AUGO

东莞市欧高电子有限公司
DONGGUAN AUGO ELECTRONICS CO., LTD.

PART NAME		TACT SWITCH				DRAWING		Y,C,ZHANG	DWG.No.	TC1150W
PART NO.		TC-1150W				CHECK		G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3'	ANGLE	APPROVAL	DATE		14-03-2013	
	mm					SCALE	2:1	PAGE	1 OF 1	