
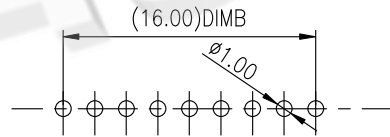
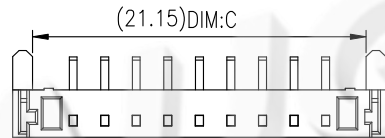

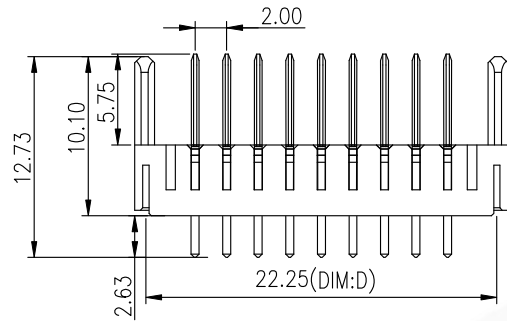


Rohs

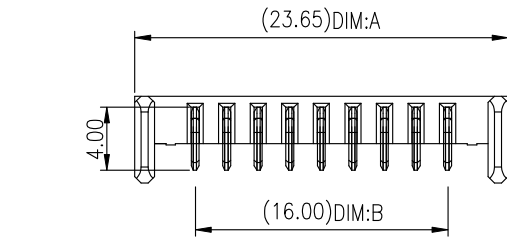

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

REV.	DESCRIPTION	DRAW.	DATE.

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
03	11.65	4.00	9.15	10.25
04	13.65	6.00	11.15	12.25
05	15.65	8.00	13.15	14.25
06	17.65	10.00	15.15	16.25
07	19.65	12.00	17.15	18.25
08	21.65	14.00	19.15	20.25
09	23.65	16.00	21.15	22.25
10	25.65	18.00	23.15	24.25
11	27.65	20.00	25.15	26.25
12	29.65	22.00	27.15	28.25
13	31.65	24.00	29.15	30.25
14	33.65	26.00	31.15	32.25

Material:

Insulator : NYLON 9T (UL94V-0)

Contact : Phosphor Bronze

Contact Plated : Gold over Nickel or Tin

Specification:

Current Rating : 5A

Instant Current : 7A

Voltage Rating : 30V

Contact Resistance : 30m Ω

Insulation Resistance : 100M Ω

Dielectric Voltage : 500V

Operating Temperature : -25°~85°

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:

01

UNLESS OTHERWISE
SPECIFIED,TOLERANCE:

SIZE:

A4

SCALE: 1:1

UNIT: mm

SHEET: 1/1



TITLE:

BATTERY MALE 2.0 PITCH
BOARD TO BOARD CONNECTOR

PART NO:

AUGO-A04M-A

DESIGN

G.C.CHEN

DATE

DRAWING

Y.C.ZHANG

DATE

CHECK

D.J.WANG

DATE

SCALE

1:1

PAGE

1 OF 1