

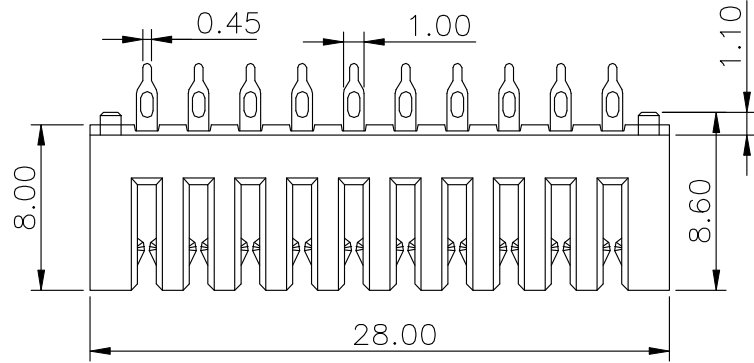
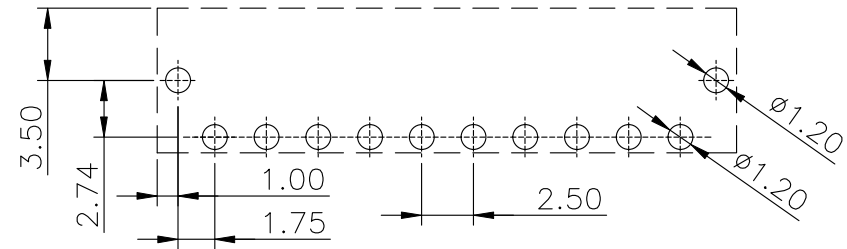
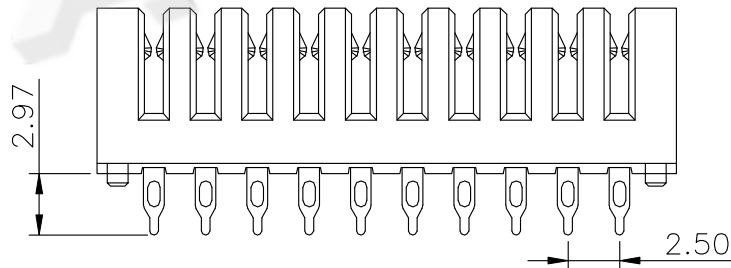


Rohs

REV.	DESCRIPTION	DRAW.	DATE.



Material:
 Insulator : NYLON 9T (UL94V-0)
 Contact : Phosphor Bronze
 Contact Plated : Gold over Nickel or Tin
 Specification:
 Current Rating : 5A
 Instant Current : 7A
 Voltage Rating : 30V
 Contact Resistance : 30m Ω
 Insulation Resistance : 100M Ω
 Dielectric Voltage : 500V
 Operating Temperature : -25°~85°

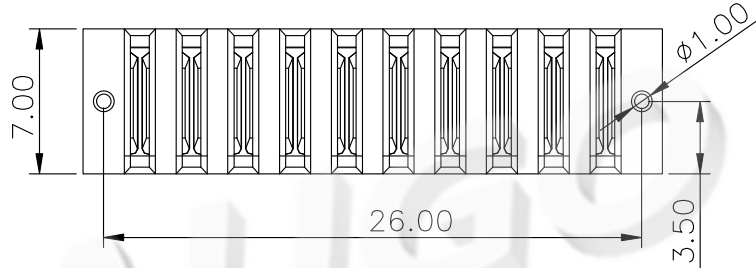

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01
SIZE:	A4
SCALE:1:1	UNIT:mm
SHEET:1/1	

UNLESS OTHERWISE SPECIFIED,TOLERANCE:	
X.	±0.20
X.x	±0.15
X.xx	±0.10
ANGULAR	±2°

TITLE:	BATTERY FEMALE 2.5 PITCH BOARD TO BOARD CONNECTOR
PART NO.	AUGO-K1-A-10P

DESIGN	G.C.CHEN	DATE	
DRAWING	Y.C.ZHANG	DATE	
CHECK	D.J.WANG	DATE	
SCALE	1:1	PAGE	1 OF 1