


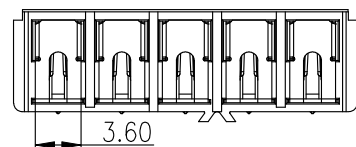

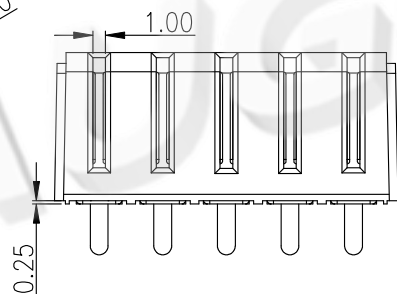
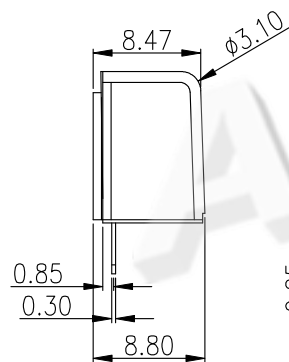
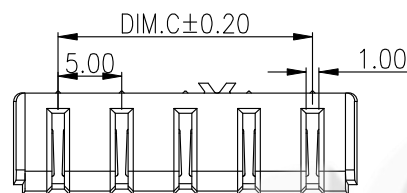


Rohs

REV.	DESCRIPTION	DRAW.	DATE.

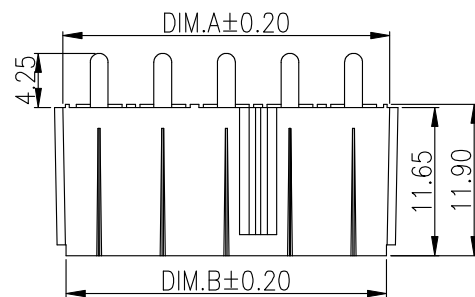

PART NO.	PIN	Dim.A	Dim.B	Dim.C
AUGO-DF50-D-2P	2pin	10.70	10.20	5.00
AUGO-DF50-D-3P	3pin	15.70	15.20	10.00
AUGO-DF50-D-4P	4pin	20.70	20.20	15.00
AUGO-DF50-D-5P	5pin	25.70	25.20	20.00



RECOMMENDED P.C. BOARD LAYOUT

Material:  
 Insulator : LCP OR NYLON 9T (UL94V-0)  
 Contact : Phosphor Bronze  
 Contact Plated : Gold over Nickel or Tin  
 Specification:  
 Current Rating : 8A/PIN  
 Voltage Rating : 12V  
 Contact Resistance : 30m Ω  
 Insulation Resistance : 1000M Ω  
 Dielectric Voltage : 500V  
 Operating Temperature : -25°~85°

**AUGO**

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED, TOLERANCE:	TITLE:	BATTERY FEMALE 5.0 PITCH BOARD TO BOARD CONNECTOR	DESIGN	G.C.CHEN	DATE		
SIZE:	A4				X.	±0.20	DRAWING	Y.C.ZHANG	DATE
SCALE: 1:1	UNIT: mm	X.x	±0.15	PART NO:	AUGO-DF50-D	CHECK	D.J.WANG	DATE	
SHEET: 1/1		X.xx	±0.10			SCALE	1:1	PAGE	1 OF 1
		ANGULAR	±2°						