


Rohs

REV.	DESCRIPTION	DRAW.	DATE.

PART NO.	PIN	Dim.A	Dim.B	Dim.C
AUGO-DF50-S-2P	2pin	10.70	10.20	5.00
AUGO-DF50-S-3P	3pin	15.70	15.20	10.00
AUGO-DF50-S-4P	4pin	20.70	20.20	15.00
AUGO-DF50-S-5P	5pin	25.70	25.20	20.00

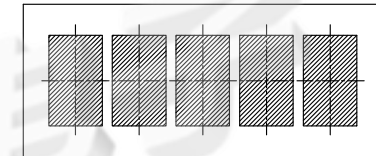

RECOMMENDED P.C. BOARD LAYOUT

Material:

Insulator : LCP OR NYLON 9T (UL94V-0)

Contact : Phosphor Bronze

Contact Plated : Gold over Nickel or Tin

Specification:

Current Rating : 8A/PIN

Voltage Rating : 12V

Contact Resistance : 30m Ω

Insulation Resistance : 1000M Ω

Dielectric Voltage : 500V

Operating Temperature : -25°~85°

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		TITLE:	BATTERY FEMALE 5.0 PITCH BOARD TO BOARD CONNECTOR	DESIGN	G.C.CHEN	DATE	
SIZE:	A4					DRAWING	Y.C.ZHANG	DATE	
SCALE: 1:1	UNIT: mm	X.	±0.20	PART NO:	AUGO-DF50-S	CHECK	D.J.WANG	DATE	
SHEET: 1/1		X.x	±0.15			SCALE	1:1	PAGE	1 OF 1
		X.xx	±0.10						
		ANGULAR	±2°						