
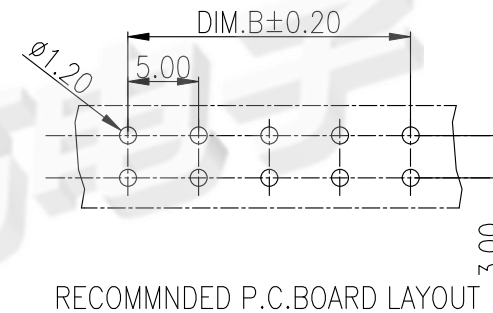

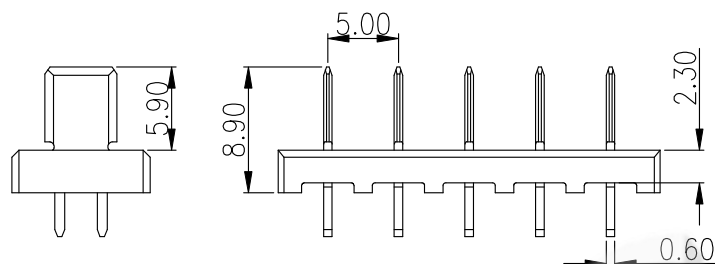
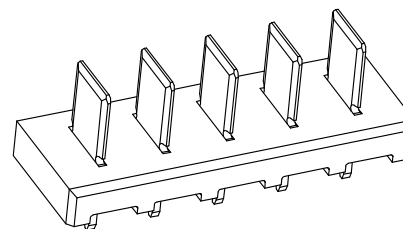


Rohs

REV.	DESCRIPTION	DRAW.	DATE.

PART NO.	PIN	Dim.A	Dim.B
Battery PH5.0 H=8.9mm	02pin	12.00	5.00
Battery PH5.0 H=8.9mm	03pin	17.00	10.00
Battery PH5.0 H=8.9mm	04pin	22.00	15.00
Battery PH5.0 H=8.9mm	05pin	27.00	20.00

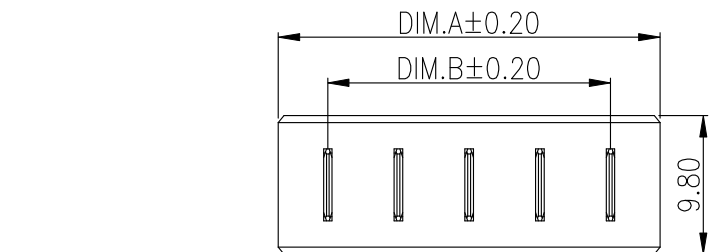

Material:
Insulator : LCP OR NYLON 9T (UL94V-0)
Contact : Phosphor Bronze
Contact Plated : Gold over Nickel or Tin
Specification:
Current Rating : 8A/PIN
Voltage Rating : 12V
Contact Resistance : 30m Ω
Insulation Resistance : 1000M Ω
Dielectric Voltage : 1000V
Operating Temperature : -25°~85°

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		TITLE:	BATTERY MALE 5.0 PITCH BOARD TO BOARD CONNECTOR	DESIGN	G.C.CHEN	DATE	
SIZE:	A4					DRAWING	Y.C.ZHANG	DATE	
SCALE: 1:1	UNIT: mm	X.	±0.20	PART NO:	AUGO-DM50-D	CHECK	D.J.WANG	DATE	
SHEET: 1/1		X.x	±0.15			SCALE	1:1	PAGE	1 OF 1
		X.xx	±0.10						
		ANGULAR	±2°						