
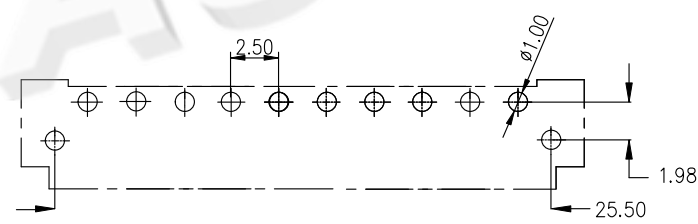

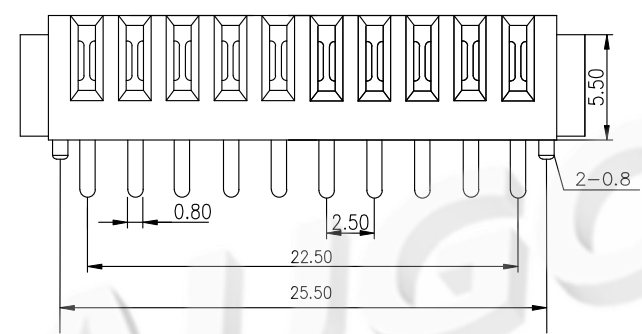


Rohs

REV.	DESCRIPTION	DRAW.	DATE.

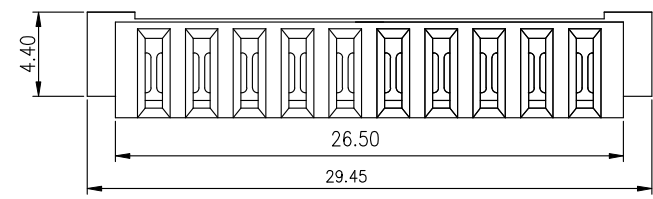

Recommended P.C.B Layout

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.E
03	5.00	9.00	11.95	2.1/3.0
04	7.50	11.50	14.45	2.1/3.0
05	10.00	14.00	16.95	2.1/3.0
06	12.50	16.50	19.45	2.1/3.0
07	15.00	19.00	21.96	2.1/3.0
08	17.50	21.50	24.45	2.1/3.0
09	20.00	24.00	26.95	2.1/3.0
10	22.50	26.50	29.45	2.1/3.0
11	25.00	29.00	31.95	2.1/3.0
12	27.50	31.50	34.45	2.1/3.0

Material:  
 Insulator : NYLON 9T (UL94V-0)  
 Contact : Phosphor Bronze  
 Contact Plated : Gold over Nickel or Tin  
 Specification:  
 Current Rating : 5A  
 Instant Current : 7A  
 Voltage Rating : 30V  
 Contact Resistance : 30m Ω  
 Insulation Resistance : 100M Ω  
 Dielectric Voltage : 500V  
 Operating Temperature : -25°~85°

**AUGO**

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED,TOLERANCE:	TITLE:	BATTERY FEMALE 2.0PITCH BOARD TO BOARD CONNECTOR	DESIGN	G.C.CHEN	DATE	
SIZE:	A4			X.	±0.20	DRAWING	Y.C.ZHANG	DATE
SCALE: 1:1	UNIT: mm	X.x	±0.15	PART NO:	CHECK	D.J.WANG	DATE	
SHEET: 1/1		X.xx	±0.10		AUGO-B01F-X	SCALE	1:1	PAGE
		ANGULAR	±2°					