
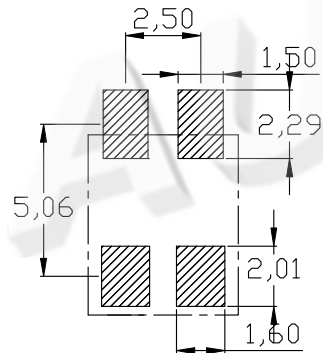

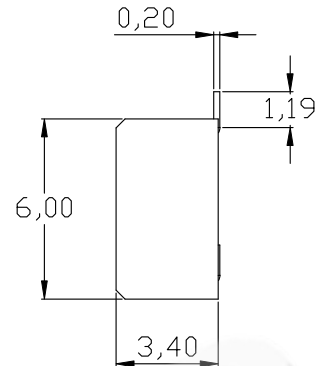
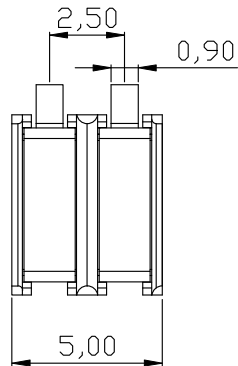


Rohs

REV.	DESCRIPTION	DRAW.	DATE.



RECOMMENDED PCB LAYOUT
TOP VIEW (. XX±0.05)

Material:
Insulator : LCP(UL94V-0)
Contact : Phosphor Bronze
Contact Plated : Gold over Nickel or Tin
Specification:
Current Rating : 3A
Voltage Rating : 30V
Contact Resistance : 30m Ω
Insulation Resistance : 500M Ω
Dielectric Voltage : 500V
Operating Temperature : -40°~125°
Electrical Life : 10000cycles

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:

01


SIZE:

A4

SCALE:1:1

UNIT:mm

SHEET:1/1



UNLESS OTHERWISE
SPECIFIED,TOLERANCE:

X. ±0.20

X.x ±0.15

X.xx ±0.10

ANGULAR ±2°

TITLE:

2.5 PITCH
BATTERY CONNECTOR

PART NO:

AUGO-BF-25-2PD340

DESIGN

G.C.CHEN

DATE

DRAWING

Y.C.ZHANG

DATE

CHECK

D.J.WANG

DATE

SCALE

1:1

PAGE

1 OF 1