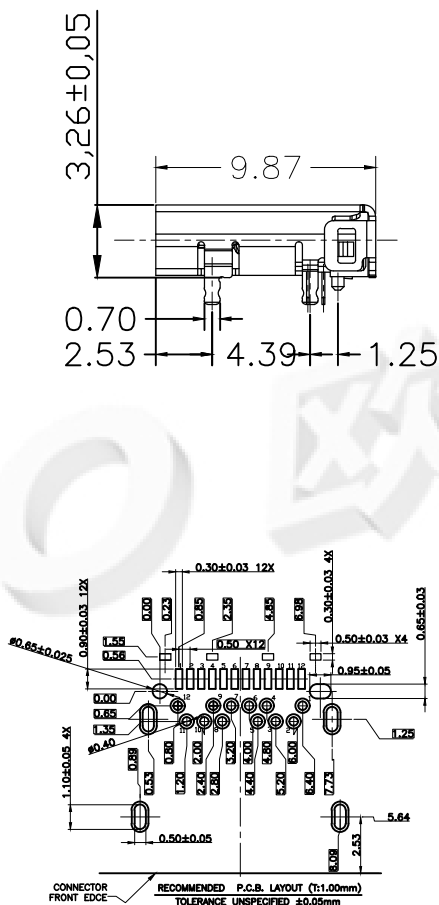
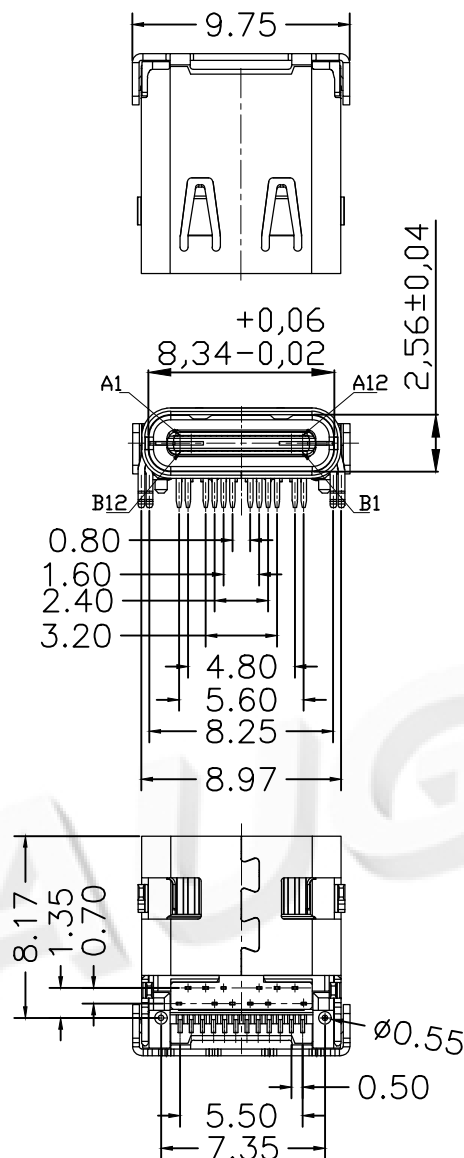


备注:

1.材质:

1.1胶芯: LCP+30%G.F UL94V-0

1.2端子: 磷铜, T=0.12mm; 镍底, 镀金 μ "1.3外壳: 不锈钢, T=0.30mm; 表面镀镍100 μ "
或亮锡100 μ "

1.4接地片: 不锈钢, T=0.10mm;

1.5卡片: 不锈钢, T=0.15mm;

2.主要特性:

2.1额定电流: 5A

2.2接触阻抗: 30m Ω MAX2.3绝缘阻抗: 100M Ω MIN 250V DC

2.4耐压测试: 250V AC

2.5沾锡性: 温度250±5℃, 时间5±0.5s

2.6整体插入力: 3.57kgf MAX

整体拔出力: 1.02kgf MIN

2.7使用寿命: 10000次

2.8工作温度: -30℃~+80℃

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR				DRAWING	Y,C,ZHANG	DWG.No.	
PART NO.		USB 3.1Type-C 24PIN母座前插后贴				CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3°	ANGLE	APPROVAL		DATE	
	mm						SCALE	2:1	PAGE