
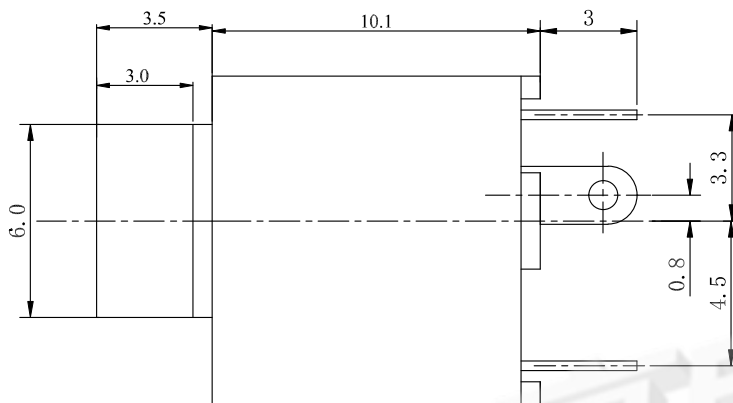


RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

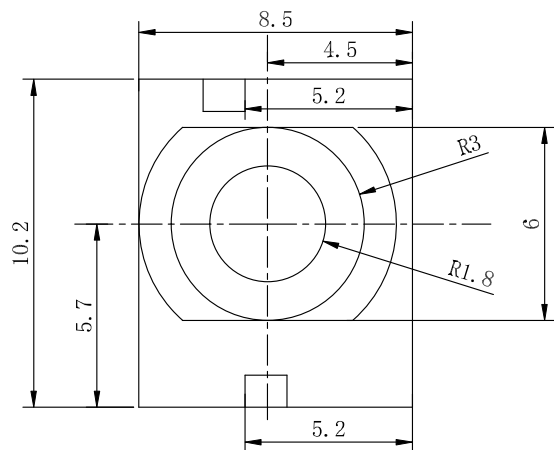


主要技术性能


1. 额定电负荷 : 30V 0.5A;
2. 接 触 电 阻: $\leq 0.03\Omega$;
3. 绝 缘 电 阻: $\geq 100M\Omega$;
4. 耐 压: AC500V(50Hz)min;
5. 插 拔 力: 3-15N;
6. 寿 命: 5,000次。

主要技术要求

1. 未注线性公差:
 - 0.0-10.0mm ± 0.10 mm
 - 10.0-20.0mm ± 0.15 mm
 - 20.0-50.0mm ± 0.20 mm
2. 外观应良好, 无锈蚀、裂痕、电镀不良等现象。

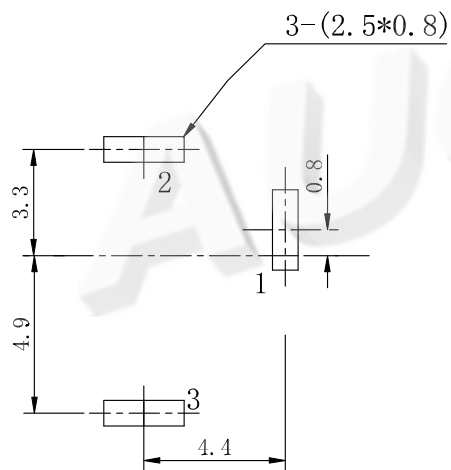

P. C. B LAYOUT



5	基座	1	PBT	黑
4	轴套	1	H59黄铜	镍
3	接触脚3	1	磷青铜T0.30	锡铈
2	接触脚2	1	磷青铜T0.30	锡铈
1	接触脚1	1	黄铜T0.30	锡铈
序号	名 称	数量	材 料	镀 涂

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		PHONE JACK				DRAWING	Y,C,Zhang	DWG.No.	
PART NO.		PJ-301C				CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE	
	mm		ABOVE 5 至	±0.3					
	mm		ABOVE 30	±0.5	0°±3°	SCALE		5:2	PAGE
			ANGLE	±3°					1 OF 1