

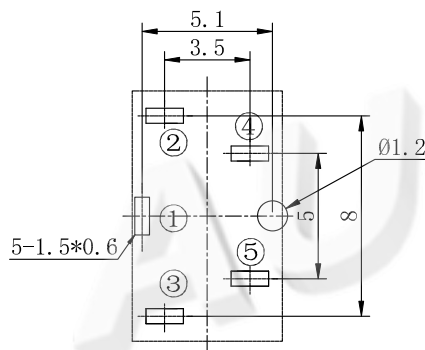
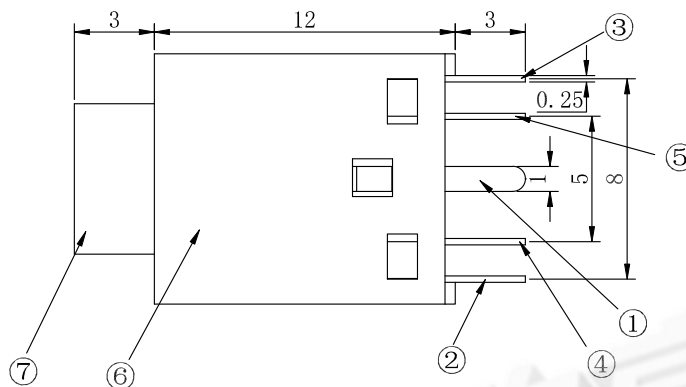


RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE



P. C. B LAYOUT

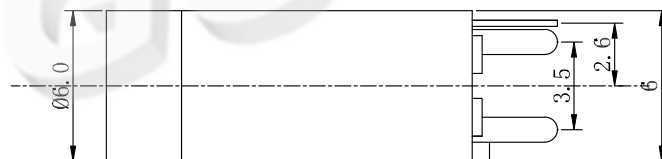


主要技术性能

1. 额定电负荷 : 30V 0.5A;
2. 接 触 电 阻: $\leq 0.03\Omega$;
3. 绝 缘 电 阻: $\geq 100M\Omega$;
4. 耐 压: AC500V (50Hz)min;
5. 插 拔 力: 3-15N;
6. 寿 命: 5,000次。

产品要求

1. 未注线性公差:
 - 0.0-10.0mm ± 0.10 mm
 - 10.0-20.0mm ± 0.15 mm
 - 20.0-50.0mm ± 0.20 mm
2. 外观应良好, 无锈蚀、裂痕、电镀不良等现象。



7	外外套	1	黄铜H59	铜锡	
6	基座	1	PBT		黑
5	接触弹片	1	T0.3黄铜H62	银	
4	接触静片	1	T0.3黄铜H62	银	
3	接触弹片	1	T0.25磷铜	银	
2	接触弹片	1	T0.25磷铜	银	
1	接地PIN1	1	T0.25磷铜	银	
序号	名 称	数量	材 料	镀 涂	备注

DONGGUAN AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		PHONE JACK				DRAWING	Y,C,Zhang	DWG.No.	
PART NO.		PJ- 358TF				CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3°	ANGLE	APPROVAL	DATE		
	mm				0°±3°	SCALE	5:2	PAGE	1 OF 1