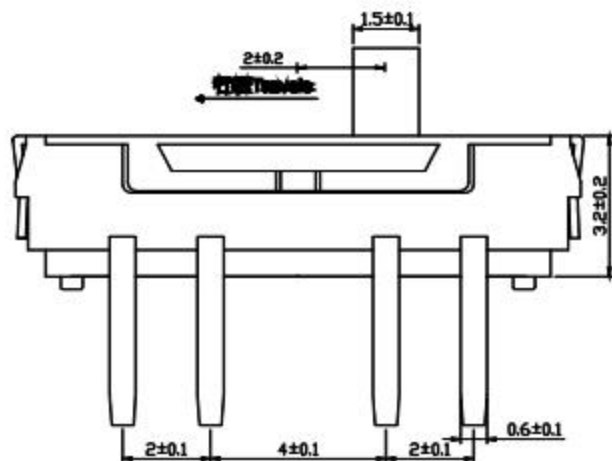


## 主要技术规格:

1. 额定值: 10mA DC12V
2. 接触电阻: 100mΩ
3. 操作力: 250gf±100gf
4. 行程: 2.0±0.2mm
5. 绝缘电阻: 100MΩ
6. 抗电强度: 500V 50HZ 1Min.
7. 寿命: 1万Cycles

## 材料:

- A底座: LCP (黑色)  
B端子: 磷铜 (镀银)  
C簧片: 铍青铜 (镀银)  
D胶柄: PA46 (黑色)  
E盖板: 不锈钢301 (清洗)

DONGGUAN AUGO ELECTRONIC CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

|           |        |                        |              |      |       |          |           |         |            |
|-----------|--------|------------------------|--------------|------|-------|----------|-----------|---------|------------|
| PART NAME |        | SWITCH                 |              |      |       | DRAWING  | Y.C,ZHANG | DWG.No. | SBICL      |
| PART NO.  |        | MSS-23D18G2            |              |      |       | CHECK    | G.C.Chen  | REV.    | A1         |
|           | UNIT : | TOLERANCE<br>OTHERWISE | UP TO 5      | ±0.2 | ANGLE | APPROVAL |           | DATE    | 14-03-2013 |
|           | mm     |                        | ABOVE 5 ~ 30 | ±0.3 |       | SCALE    | 2:1       | PAGE    | 1 OF 1     |
|           |        |                        | ABOVE 30     | ±0.5 |       |          |           |         |            |
|           |        |                        | ANGLE        | ±3°  |       |          |           |         |            |