
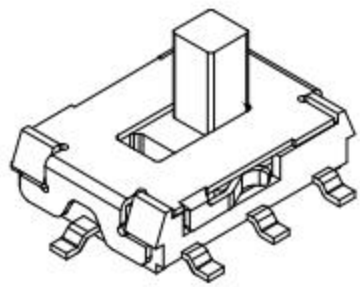
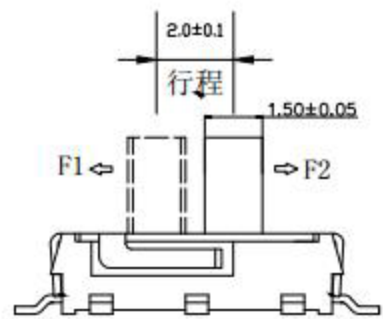
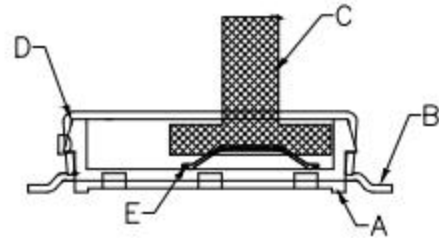
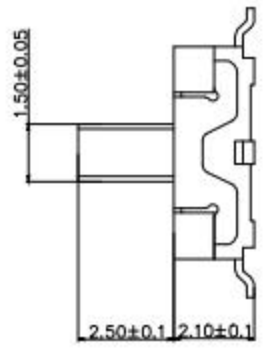
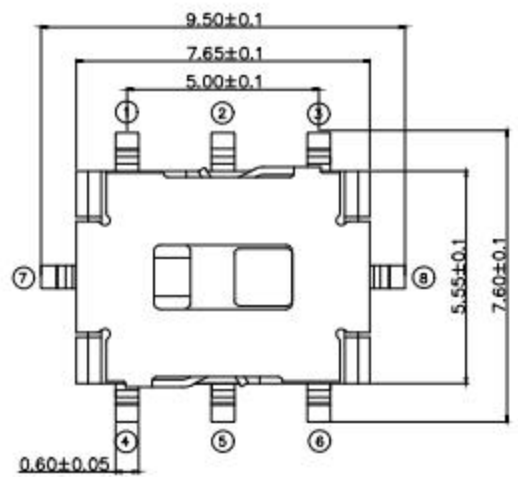
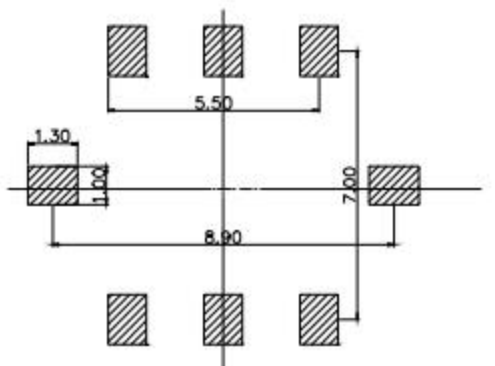


电路图

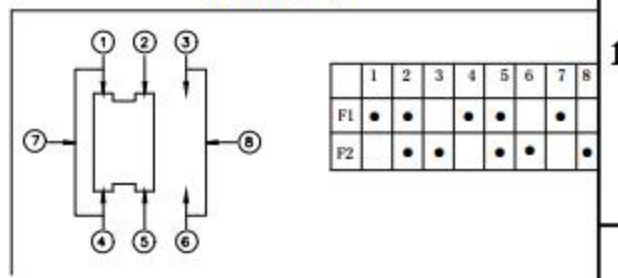

材料:
 A底座: LCP(黑色)
 B嵌件: 黄铜(镀银与银白色)
 C桃心: PPA(黑色)
 D盖板: 不锈钢(清洗)
 E按钮: 复银铜(银白色)

- 主要技术规格:
1. 额定值: 50mA DC12V
 2. 接触电阻: ≤50mΩ
 3. 操作力: 200gf±100gf
 4. 行程: 2.0±0.2mm
 5. 绝缘电阻: ≥100MΩ
 6. 耐压强度: AC250V 50Hz/1Min.
 7. 寿命: 1万Cycles Min
 8. 温度范围: -30℃ TO +80℃

DONGGUAN AUGO ELECTRONIC CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		Y.C,ZHANG		DWG.No.		SBICL	
PART NO.		MSK-2276S		CHECK		G.C.Chen		REV.		A1	
UNIT :	TOLERANCE	OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	14-03-2013		1 OF 1	
			ABOVE 5~30	±0.3				0°±3'	SCALE		
mm			ABOVE 30	±0.5							
			ANGLE	±3'							