

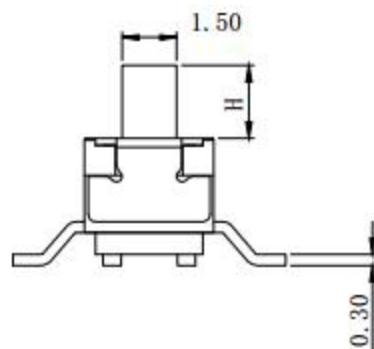
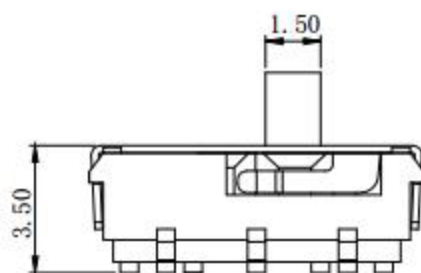
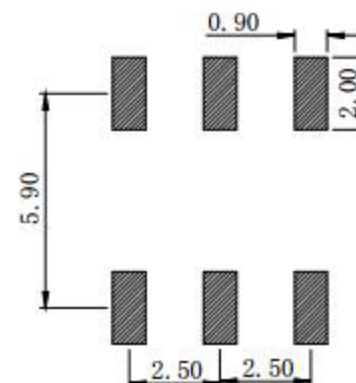



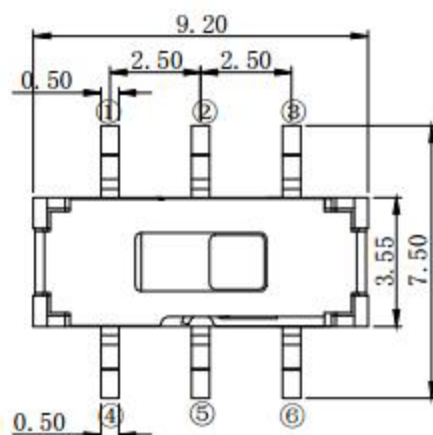

MODLE	
PART NO	H
F	2
K	3
L	4



材料:

A底座/基座: LCP(黑色)

B嵌件: 黄铜(整体镀银与银白色)

C簧片: 铍青铜(整体镀银与银白色)

D手柄: PPA(黑色)

E盖板: 不锈钢(整体清洗与原色)

主要技术规格:

1. 额定值: 50mA
2. 接触电阻: $\leq 70m\Omega$
3. 操作力: $200gf \pm 50gf$
4. 行程: $2.0 \pm 0.1mm$
5. 绝缘电阻: $\geq 100M\Omega$
6. 耐压强度: AC250V 50HZ/ 1Min.
7. 寿命: 5万Cycles Min
8. 额定电压: DC 12V

DONGGUAN AUGO ELECTRONIC CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		SWITCH				DRAWING		Y.C.ZHANG	DWG.No.	SBICL
PART NO.		MSS-22D27-X				CHECK		G.C.Chen	REV.	A1
	UNIT :		TOLERANCE		APPROVAL		DATE		14-03-2013	
	mm		UP TO 5 ±0.2		ANGLE		SCALE		2:1	
			ABOVE 5 ~30 ±0.3		0°±5'				PAGE	
			ABOVE 30 ±0.5						1 OF 1	