
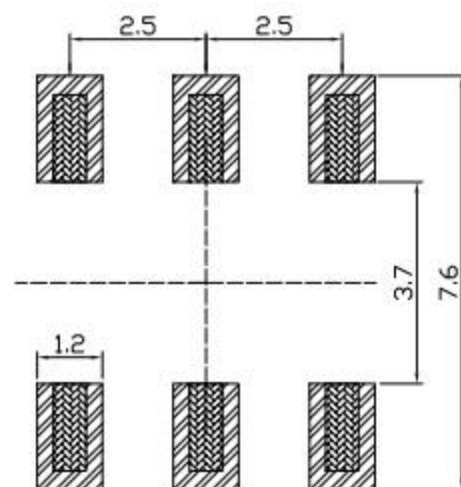
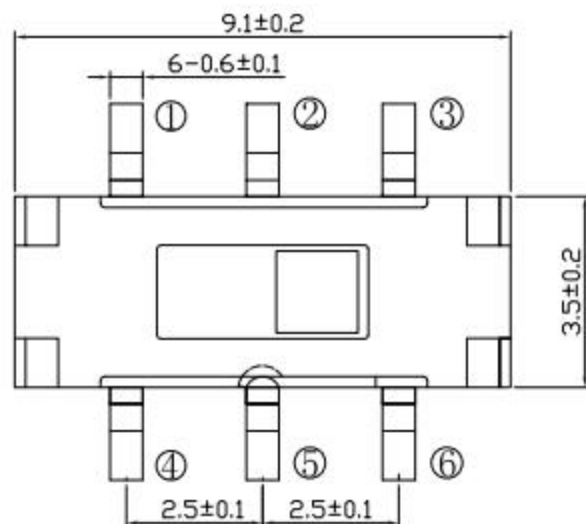

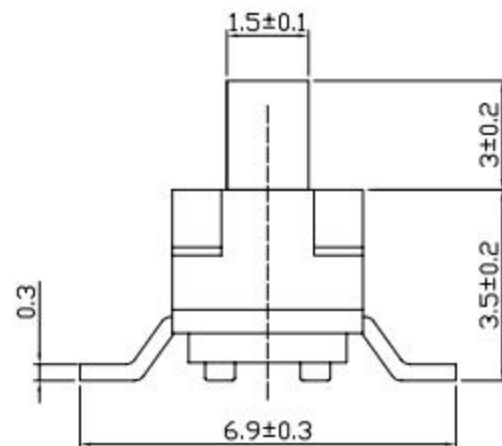


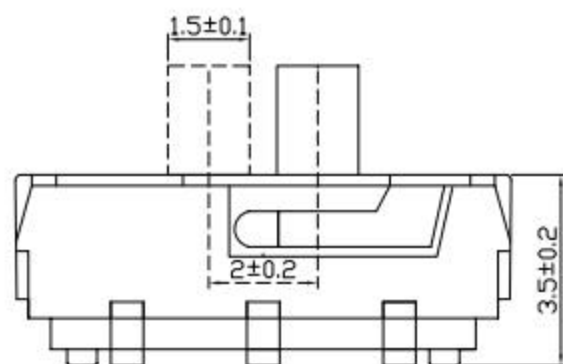

主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: 50mΩ
3. 操作力: 250gf±100gf
4. 行程: 2.0±0.2mm
5. 绝缘电阻: 100MΩ
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 1万Cycles

材料:

- A底座: PA6T+磷铜镀银 (黑色+银白色)
 B推柄: PA46 (黑色)
 C盖子: 不锈钢 (本色)
 D接触簧片: 铍青铜 (镀银)

DONGGUAN AUGO ELECTRONIC CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		SWITCH			DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		MSS-22D27G2			CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ANGLE	±0.2 ±0.3 ±0.5 ±3°	ANGLE 0°±3°	APPROVAL		DATE	14-03-2013
					SCALE	2:1	PAGE	1 OF 1