

Rohs

REV.	DESCRIPTION	DRAW.	DATE.
A0	NEW RELEASE	Y.C.ZHANG	2024/07/20

No. of Pins	Dimension			
	DIM A	DIM B	DIM C	DIM D
2Pin	6.60	4.60	1.50	3.60
3Pin	8.10	6.10	3.00	5.10
4Pin	9.60	7.60	4.50	6.60
5Pin	11.10	9.10	6.00	8.10
6Pin	12.60	10.60	7.50	9.60
7Pin	14.10	12.10	9.00	11.10
8Pin	15.60	13.60	10.50	12.60
9Pin	17.10	15.10	12.00	14.10
10Pin	18.60	16.60	13.50	15.60
11Pin	20.10	18.10	15.00	17.10
12Pin	21.60	19.60	16.50	18.60
13Pin	23.10	21.10	18.00	20.10
14Pin	24.60	22.60	19.50	21.60
15Pin	26.10	24.10	21.00	23.10
16Pin	27.60	25.60	22.50	24.60

Material:

Insulator : NYLON 9T (UL94V-0)

Contact : Phosphor Bronze

Contact Plated : Gold over Nickel or Tin

Specification:

Current Rating : 5A

Instant Current : 7A


Voltage Rating : 20V

Contact Resistance : 30mΩ

Insulation Resistance : 100MΩ


Dielectric Voltage : 500V

Operating Temperature : -25°~85°

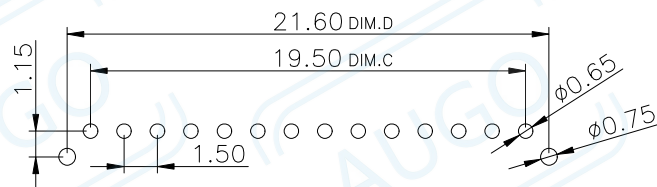

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

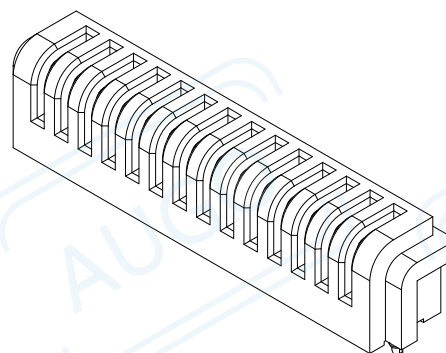

AUGO

东莞市欧高电子有限公司
Dongguan Augo Electronics Co.,Ltd
地址:广东省东莞市黄江镇新市东江路6号富汇创园 电话:0769-83383791

REV:

01

SIZE:

A4

SCALE:1:1

UNIT:mm

SHEET:1/1



UNLESS OTHERWISE
SPECIFIED,TOLERANCE:

X.

±0.20

X.x

±0.15

X.xx

±0.10

ANGULAR
±2°

TITLE:

BATTERY MALE 1.5PITCH
BOARD TO BOARD
CONNECTOR

PART NO:

AUGO-B15F-14P-S25

DESIGN

G.C.CHEN

DATE

2024/07/18

DRAWING

Y.C.ZHANG

DATE

2024/07/18

CHECK

D.J.WANG

DATE

2024/07/20

SCALE

1:1

PAGE

1 OF 1

COPYRIGHT RESERVED,PLEASE DO NOT COPY.