


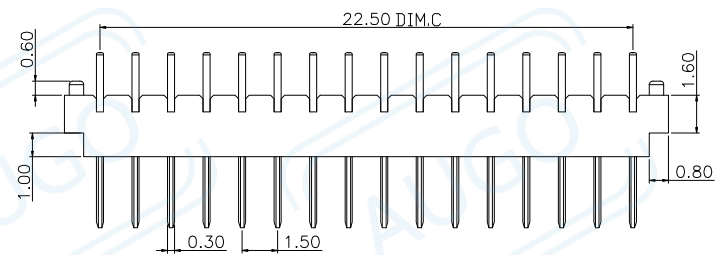


Rohs

REV.	DESCRIPTION	DRAW.	DATE.

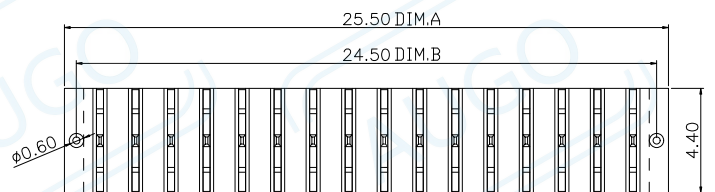


No. of Pins	Dimension		
	DIM.A	DIM.B	DIM.C
02	4.50	3.50	1.50
03	6.00	5.00	3.00
04	7.50	6.50	4.50
05	9.00	8.00	6.00
06	10.50	9.50	7.50
07	12.00	11.00	9.00
08	13.50	12.50	10.50
09	15.00	14.00	12.00
10	16.50	15.50	13.50
11	18.00	17.00	15.00
12	19.50	18.50	16.50
13	21.00	20.00	18.00
14	22.50	21.50	19.50
15	24.00	23.00	21.00
16	25.50	24.50	22.50

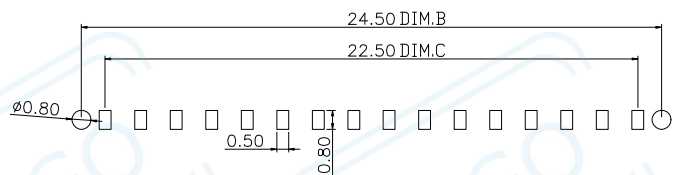

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

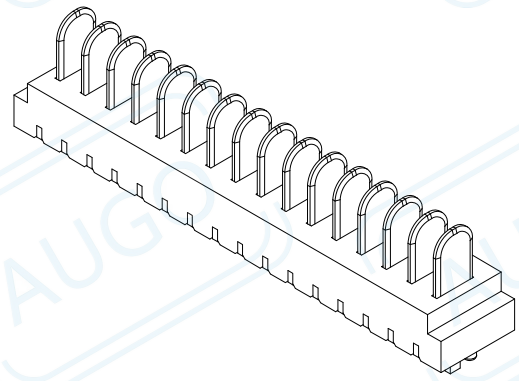

Material:
Insulator : NYLON 9T (UL94V-0)
Contact : Phosphor Bronze
Contact Plated : Gold over Nickel or Tin
Specification
Current Rating : 3A
Instant Current : 5A
Voltage Rating : 20V
Contact Resistance : 30mΩ
Insulation Resistance : 100MΩ
Dielectric Voltage : 500V
Operating Temperature : -25°~85°

AUGO

东莞市欧高电子有限公司
Dongguan Augo Electronics Co.,Ltd
地址:广东省东莞市黄江镇新市东江路8号富汇创园 电话:0769-83383791

REV: 01
SIZE: A4
SCALE: 1:1
SHEET: 1/1

UNLESS OTHERWISE SPECIFIED,TOLERANCE:
X. ±0.20
X.x ±0.15
X.xx ±0.10
ANGULAR ±2°

TITLE: BATTERY MALE 1.5PITCH BOARD TO BOARD CONNECTOR
PART NO: AUGO-B15M-16P-30

DESIGN	G.C.CHEN	DATE	
DRAWING	Y.C.ZHANG	DATE	
CHECK	D.J.WANG	DATE	
SCALE	1:1	PAGE	1 OF 1

COPYRIGHT RESERVED,PLEASE DO NOT COPY.