

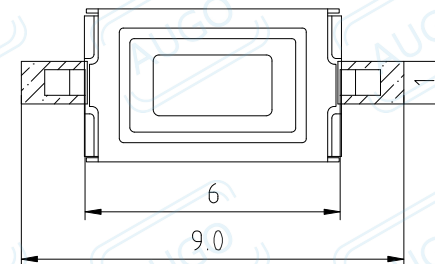

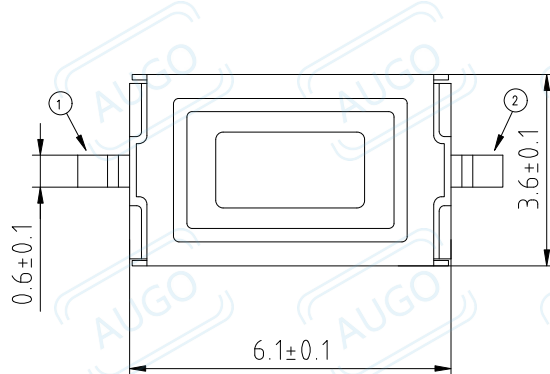



Rohs

REV.	DESCRIPTION	DRAW.	DATE.

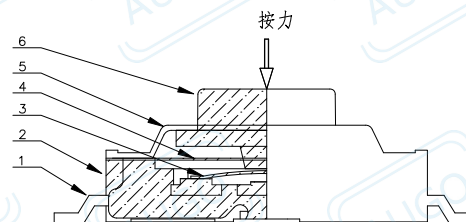

PCB板焊盘尺寸

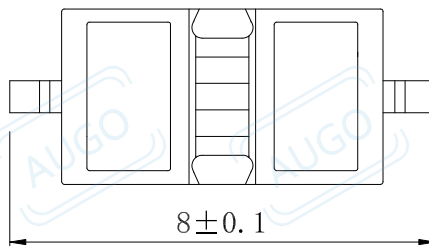

电路图

客选	高度	PCS/盘
	H=2.5mm	3000

NO.	NAME	MATERIAL	FINISHING
1	TERMINAL	phosphorous bronze	Silver plating
2	CASE	LCP	Black
3	CONTACT	SUS301	Silver plating
4	Waterproof membrane	PI	Yellow
5	COVER	SUS304	White
6	STEM	LCP	Black

SPECIFICATIONS			
Operating temperature ranges		-30° to +85°	
Rating		DC 12V 50mA Max.	
Contact Resistance		100mΩ Max	
Dielectric strength		250V AC for 1min.	
Travel		0.15±0.1mm	
Operating Force		1 160±40gf	2 260±40gf
Operating Life(cycles)		50,000	

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED,TOLERANCE:	
SIZE:	A4		
SCALE:1:1	UNIT:mm	X.	±0.20
		X.x	±0.15
		X.xx	±0.10
SHEET:1/1	⊕	ANGULAR	±2°

TITLE:	TACT SWITCH	DESIGN	G.C.CHEN	DATE	
		DRAWING	Y.C.ZHANG	DATE	
PART NO:	AUGO-TD-19XA	CHECK	D.J.WANG	DATE	
		SCALE	1:1	PAGE	1 OF 1