
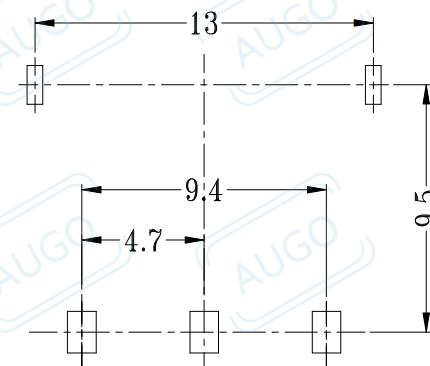
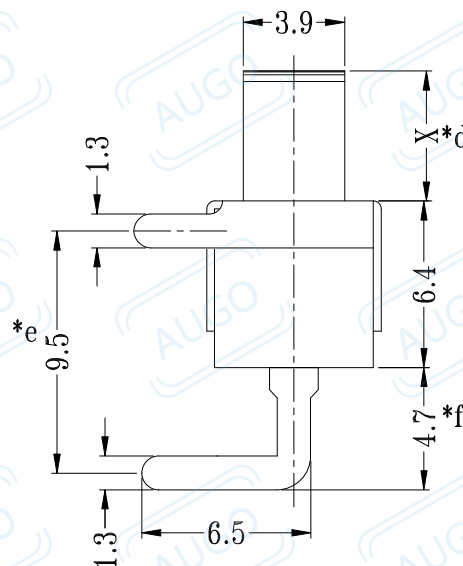
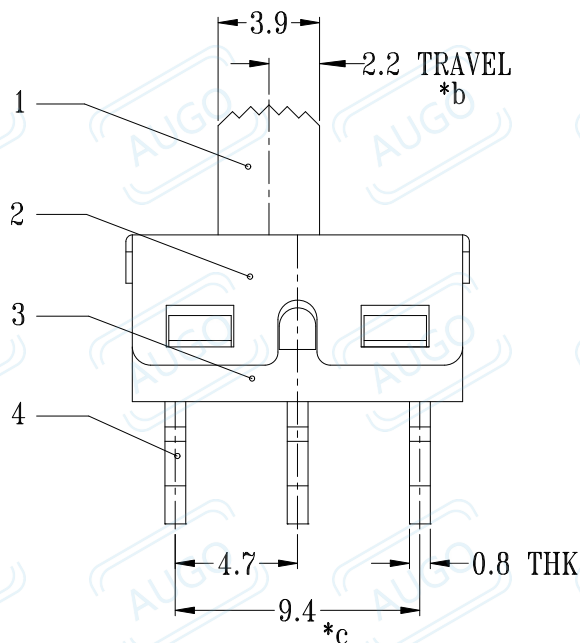
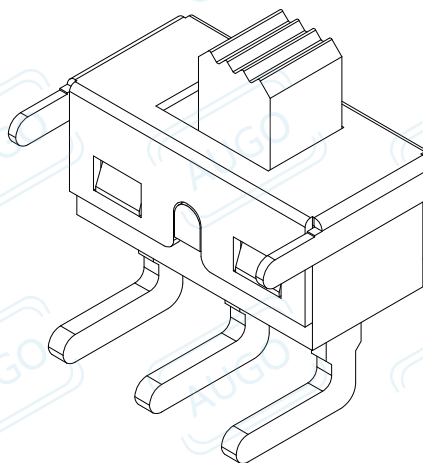


RoHS  
Compliant

| SYMBOL | REVISION | APPROVAL | DATE |
|--------|----------|----------|------|
|        |          |          |      |
|        |          |          |      |

ELECTRICAL RATING: 3A 50V DC  
CONTACT RESISTANCE: 100mΩ MAX  
INSULATION RESISTANCE: 100MΩ MIN. 500V DC  
DIELECTRIC STRENGTH: 500V AC FOR 1 MINUTE  
OPERATING FORCE: 250±100gf  
OPERATING LIFE: 10000 cycles  
OPERATING TEMPERATURE RANGE: -20℃ ~ +70℃

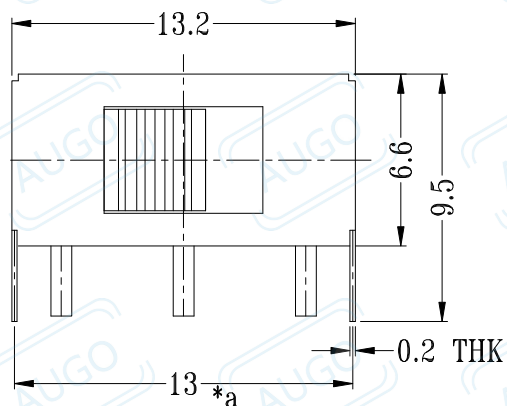

P.C.B LAYOUT  
BOTTOM VIEW

X=2.5.....10 (mm)

|     |            |             |      |           |
|-----|------------|-------------|------|-----------|
| 7   | STEEL BALL | STEEL       | 1    | NATURAL   |
| 6   | SPRING     | STEEL WIRE  | 1    | NATURAL   |
| 5   | CONTACT    | BRASS STRIP | 1    | Ag PLATED |
| 4   | TERMINAL   | BRASS STRIP | 3    | Ag PLATED |
| 3   | CASE       | PA66        | 1    | BLACK     |
| 2   | COVER      | SUS         | 1    | NATURAL   |
| 1   | KNOB       | PA66        | 1    | BLACK     |
| NO. | PARTS      | MATERIALS   | Q'TY | FINISH    |

DONGGUAN AUGO ELECTRONICS CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

| PART NAME |             | SLIDE SWITCH |                                                                | DRAWING | Y.C.Zhang | DWG.No.  |      |            |
|-----------|-------------|--------------|----------------------------------------------------------------|---------|-----------|----------|------|------------|
| PART NO.  |             | SS-12D11Gx   |                                                                | CHECK   | G.C.Chen  | REV.     | A0   |            |
|           | UNIT:<br>mm | TOLERANCE    | UP TO 5 ±0.2<br>ABOVE 5~ 30 ±0.3<br>ABOVE 30 ±0.5<br>ANGLE ±3° | ANGLE   | APPROVAL  | G.C.Chen | DATE | 2018-07-04 |
|           |             | OTHERWISE    |                                                                | 0°±3°   | SCALE     | 2:1      | PAGE | 1 OF 1     |