
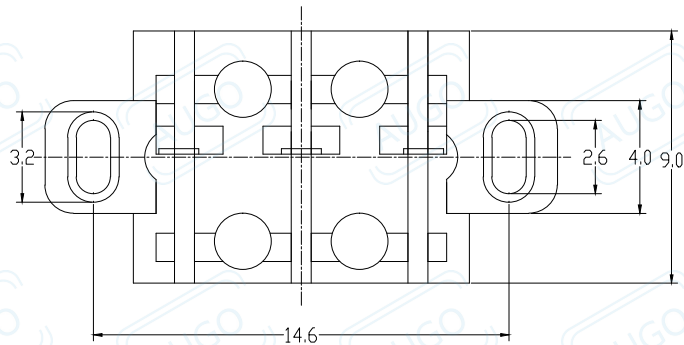

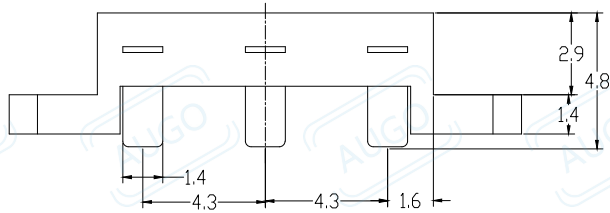


Rohs

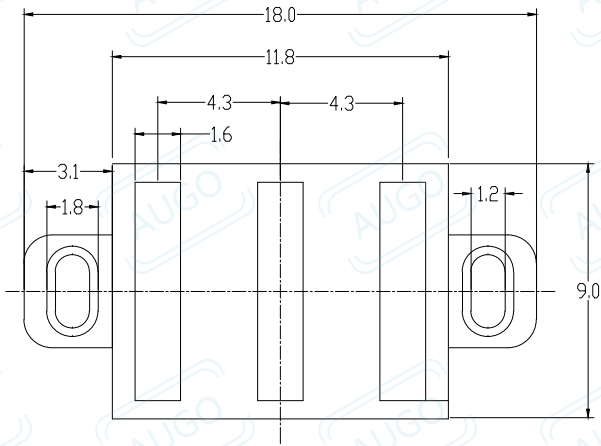

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:


1-1.RATING: DC 24V 2A

1-2.CONTACT RESISTANCE: 30mΩ MAX(INITAL)

1-3.DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

1-4.INSULATION RESISTANCE: 1000MΩ MIN,
MEASURED BY 500V DC



CIRCUIT

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:

01

SIZE:

A4

SCALE: 1:1

UNIT: mm

SHEET: 1/1



UNLESS OTHERWISE
SPECIFIED,TOLERANCE:

X.

±0.20

X.x

±0.15

X.xx

±0.10

ANGULAR ±2°

TITLE:

BATTERY CONNECTOR

PART NO:

AUGO-BF-43-3P

DESIGN

G.C.CHEN

DATE

DRAWING

Y.C.ZHANG

DATE

CHECK

D.J.WANG

DATE

SCALE

1:1

PAGE

1 OF 1