
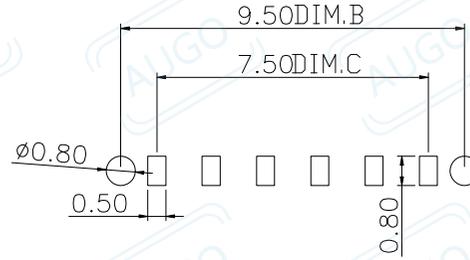


Rohs




REV.	DESCRIPTION	DRAW.	DATE.

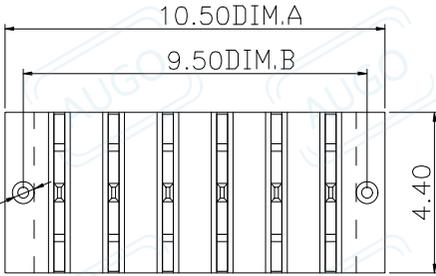

Recommended P.C.B Layout

Layout Tolerance = +/- 0.05mm

No. of Pins	Dimension		
	DIM.A	DIM.B	DIM.C
02	4.50	3.50	1.50
03	6.00	5.00	3.00
04	7.50	6.50	4.50
05	9.00	8.00	6.00
06	10.50	9.50	7.50
07	12.00	11.00	9.00
08	13.50	12.50	10.50
09	15.00	14.00	12.00
10	16.50	15.50	13.50
11	18.00	17.00	15.00
12	19.50	18.50	16.50
13	21.00	20.00	18.00
14	22.50	21.50	19.50
15	24.00	23.00	21.00
16	25.50	24.50	22.50

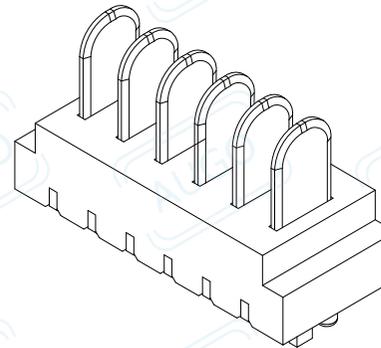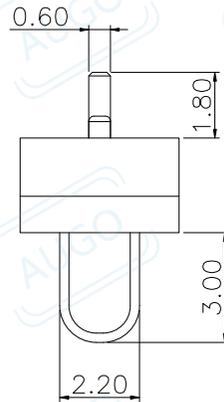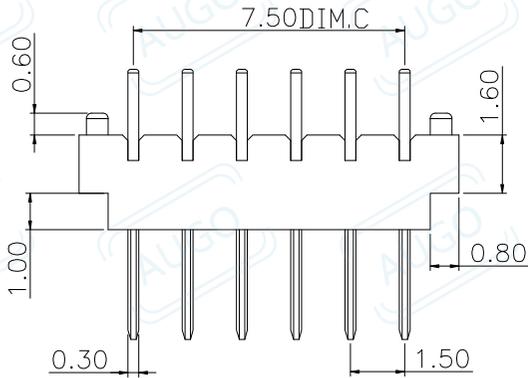

Material:

Insulator : NYLON 9T (UL94V-0)

Contact : Brass

Contact Plated : Gold over Nickel or Tin

Specification

Current Rating : 3A

Instant Current : 5A

Voltage Rating : 20V

Contact Resistance : 30mΩ

Insulation Resistance : 100MΩ

Dielectric Voltage : 500V

Operating Temperature : -25°~85°

**AUGO**

东莞市欧高电子有限公司  
Dongguan Augo Electronics Co., Ltd  
地址: 广东省东莞市黄江镇新市东江路8号富江创园 电话: 0769-83363791

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

REV:	01
SIZE:	A4
SCALE: 1:1	UNIT: mm
SHEET: 1/1	

UNLESS OTHERWISE SPECIFIED, TOLERANCE:	
X.	±0.50
X.x	±0.30
X.xx	±0.20
ANGULAR	±2°

TITLE:	BATTERY MALE 1.5PITCH BOARD TO BOARD CONNECTOR
PART NO.:	AUGO-B15M-6P-30

DESIGN	G.C.CHEN	DATE	
DRAWING	Y.C.ZHANG	DATE	
CHECK	D.J.WANG	DATE	
SCALE	1:1	PAGE	1 OF 1