


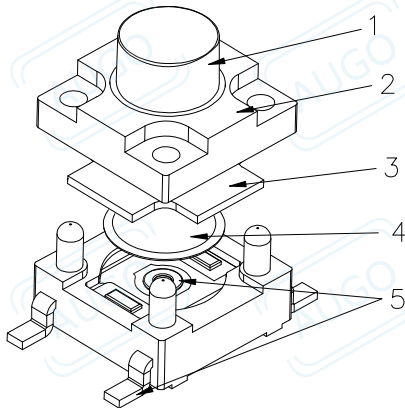

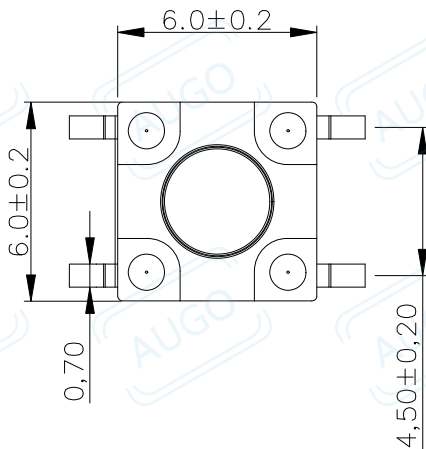


主要技术参数:


1. 额 定 值: 50mA DC12V
2. 接触电阻: $\leq 50\text{m}\Omega$
3. 操 作 力: $160\text{gf} \pm 50\text{gf} \& 250 \pm 50\text{gf}$
4. 行 程: $0.3 \pm 0.1\text{mm}$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿 命: 100,000 Cycles
8. 防水等级: IP67
9. 防银迁移: 60V, 85℃, 90%RH/60H

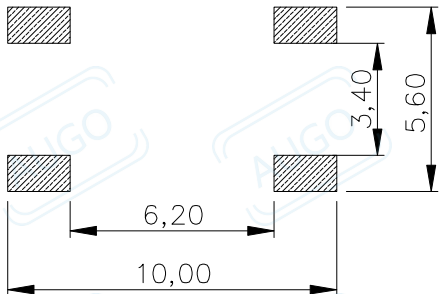

H	
4.3	4.5
5.0	5.5
6.0	6.5
7.0	7.5
8.0	8.5
9.0	9.5

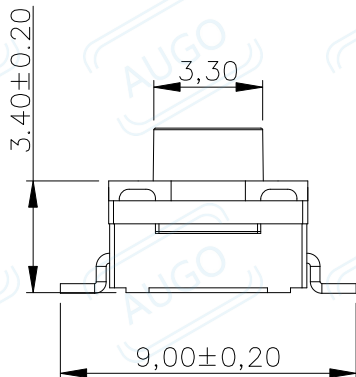

PCB.LAYOUT



序号	零件	材料	备注
1	按钮	PPA	黑色
2	盖板	PPA	黑色
3	防水垫	硅胶(0.3mm)	黑色
4	簧片	不锈钢	覆金
5	基座	PPA	黑色
6	引脚、触点	黄铜	镀金

东莞市欧高电子有限公司
DONGGUAN AUGO ELECTRONICS CO.,LTD.

PART NAME		TACT SWITCH			DRAWING	Y,C,ZHANG	DWG.No.	TD1140W
PART NO.		TD-1140W-G-H			CHECK	G.C.Chen	REV.	A0
	UNIT : mm	TOLERANCE OTHERWISE	0.5~2	±0.1	APPROVAL	G.C.Chen	DATE	14-10-2024
			2~5	±0.2				
			5~10	±0.3				
			ANGLE	±5°				
					SCALE	2:1	PAGE	1 OF 1