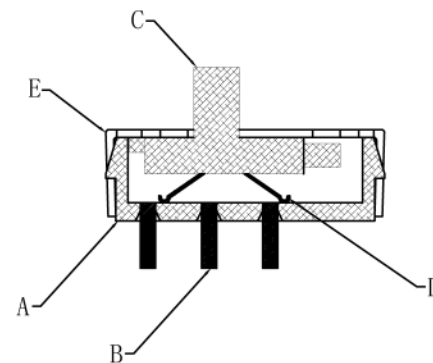
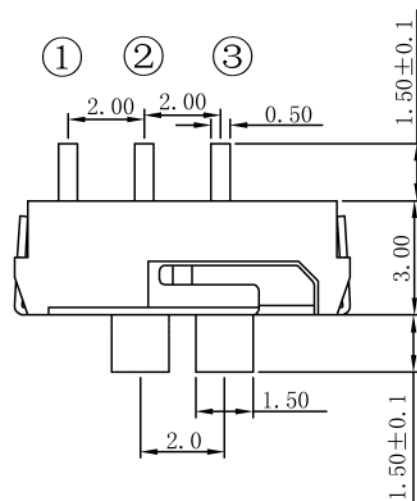


材料:

A 基座: 进口增强尼龙 (黑色)

B 嵌件: 磷铜 (整体镀银与银白色)

C 手柄: 进口增强尼龙 (黑色)

D 簧片: 镀青铜 (镀银与银白色)

E 盖板: 不锈钢 (清洗)

主要技术规格:

1. 额定值: 50mA MAX

2. 接触电阻: ≤70mΩ

3. 操作力: 180gf ± 50gf

4. 行程: 2 ± 0.2mm

5. 绝缘电阻: ≥100MΩ

6. 耐压强度: AC250V 50HZ/ 1Min.

7. 寿命: 1万Cycles Min

8. 额定电压: DC 12V

DONGGUAN AUGO ELECTRONIC CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		SWITCH			DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		MSK-12D70S			CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	14-03-2013
			ABOVE 5 ~ 30	±0.3				
	mm		ABOVE 30	±0.5	SCALE	2:1	PAGE	1 OF 1
			ANGLE	±3°				